

TEKLED



ARCHITECTURAL LIGHTING CATALOGUE

v1.0



INDOOR

CEILING

RECESSED

ALZIR A.....	10
ALZIR R.....	11
ALZIR S.....	12
ALZIR RD.....	13
ALZIR SD.....	14
ANTARES F1.....	15
ANTARES F.....	16
ANTARES T.....	17
ARCHER 1 / 2 / 3.....	18
ASTRO 50 / 60 / 75 / 90 / 120.....	19
CAELUM 60 / 75 / 90 / 110.....	20
CANIS R 75 / 90 / 105 / 120.....	21
CANIS S 75 / 90 / 105 / 120.....	22
CANIS S2 75 / 90 / 105 / 120.....	23
FELIS 75 / 95.....	24
FINLAY 2 / 3 / 3.5 / 4 / 5 / 6 / 8.....	25
CASTOR 75 O / R / S.....	26
DARA 25 / 35 / 50.....	27
CYRUS L 1 / 2 / 3.....	28
CYRUS 1 / 2 / 5 / 10 / 15.....	29
CYRUS T 1 / 2 / 5 / 10 / 15.....	30
CITLALI 6 / 12 / 18.....	31
CITLALI GD 12 / 18.....	32
CITLALI TD 12 / 18.....	33
CITLALI SD 12 / 18.....	34
HOKU 4 / 5 / 6.....	35
INDUS 85 / 120 / 170 / 220 / 300.....	36
ITRI 6060 / 60120.....	37

SURFACE

IZAR 250 / 300 / 350 / 450 / 600.....	38
NAMID 300 / 350 / 450 / 600.....	39
LEO 200 / 250 / 300.....	40
LYNX 450 / 600 / 900 / 1000.....	41
NASHI 120 / 200 / 300.....	42
NAVI 120 / 200 / 300.....	43
ORION 235 / 285 / 335.....	44
PAVO.....	45

PENDANT

PHOENIX 300 / 350 / 450 / 600.....	46
POLLUX.....	47
PYXIS.....	48
RASALAS.....	49
RASTABAN.....	50
REGULUS.....	51
RIGEL.....	52
SABIK.....	53
SAMSON 70 / 90.....	54
SCORPIUS 90 / 100.....	55

TRACK

SOLARIS 56 / 65 / 75.....	56
SAL 60 / 80 / 90.....	57
SIRIUS 200 / 250 / 300.....	58

O U T D O O R

Contents

**OUTDOOR
CEILING****RECESSED**

ALULA	60
ALYA	61
AQUILA 3 / 4 / 6 / 8	62
ARES 3 / 4 / 5 / 6 / 8	63

SURFACE

ASTREA S / R	64
ATRIA	65
CARINA 118 / 218 / 136 / 236 / 158 / 258	66
ELECTRA 118 / 218 / 136 / 236 / 158 / 258	67
ESTELLA 3 / 4 / 6 / 8	68
ETOILE	69
HELENE C	70
HESPER C	71
HINATA	72
HASHI	73
NOVA 01 / 02 / R	74
PHOEBE 250 / 350 / 450	75
REALTA 350 / 430	76
DELPHINUS SQ1 / SQ2 / RC	77
MAIA A / B / C	78
MEISSA A / B / C	79
LYRA A / B	80
MIRAM 118 / 218 / 136 / 236 / 158 / 258	81
NAJIMA 118 / 218 / 136 / 236 / 158 / 258	82
NASHIA 60 / 120 / 150	83
DANICA 60 / 120 / 150	84
CELESTE 60 / 120	85
TARAK	86
AURIGA 220 / 265 / 330 / 390	87

PENDANT

BELLATRIX 280 A-B / 320 A-B / 365 A-B	88
CALYTRIX 285 / 320 / 380	89

WALL**RECESSED**

AZHA	90
VEGA S / L	91
VESPER HS / HL / VS / VL / V1	92
STELLAN V1 / V2	93
SEREN V1 / V2	94
ROXY S / D	95

SURFACE

ROXY W	96
ARAWAN W	97
REALTIN	98
GUNAY S / L	99
MEHR L / H	100
UMBRIEL W / S	101
YVAINE W / W-SL	102
ASTROPHEL	103
ALSEPHINA A / AS	104
HESPEROS	105

ROXANNE W.....	106
HEAVEN W.....	107
VELA R / S.....	108
ZANIAH W-SL.....	109
ZVEZDA W.....	110
CASSIOPEIA W.....	111
SVETLANA W.....	112
TARABAI S / SS / D / DS / TS.....	113
LINTANG AS / AD.....	114
LINTANG BS / BD.....	115
HELENE WS / WD.....	116
HESPER WS / WD.....	117
TALITHA W.....	118
SIDRA A / B.....	119
SUNAN A / B.....	120
SHAULA A / B.....	121
ANDROMEDA A / B / C / D.....	122
SERPENS A / B / C / D.....	123
PERSEUS A / B / C / D.....	124
ZENITH 1 / 1S / 2 / 2S.....	125
YANG 1 / 2.....	126
NYOTA S / SS / L / LS.....	127
HYDRUS R / O.....	128
ARAWAN F / FS.....	129

FLOOR**SURFACE**

DRACO A.....	130
DRACO B.....	131
PEGASUS A.....	132
PEGASUS B.....	133
CASSIOPEIA F1 / F2.....	134
HEAVEN A F1 / F2 / F3.....	135
HEAVEN B F1 / F2 / F3.....	136
DIADEM 1 / 2 / 3.....	137
FULU L / H.....	138
CHASON 1 / 2 / 3.....	139
SVETLANA B.....	140
TALITHA G.....	141
BUNDA G1 / G2.....	142
ALCOR G.....	143
CORVUS F.....	144
NAOS S A / B / C.....	145

MAST-TOP

NAOS R A / B / C.....	146
URUK A / B / C / D.....	147
PETRA A / B.....	148
SKAT.....	149
SVETLANA PD.....	150
CORVUS PT.....	151
Technical Info.....	152
SYMBOLS.....	152
IP & IK Standards.....	153
DISCLAIMER & WARRANTY.....	154

TEKLED



About Us

Established in 2004, TEKLED is a leading supplier/manufacturer of quality indoor and outdoor lighting fixtures for commercial, industrial, and retail use. TEKLED has a wide range of products benefits from the latest innovations in energy-saving and efficient LED lighting technologies.

Based in Nottingham-UK, TEKLED is supplying lighting fixtures for various types of applications such as,

- **Hospitality,**
- **Residential,**
- **Retail,**
- **Public,**
- **Infrastructure.**

The company is established with the purpose of bringing the experience and knowledge of TEKLED in lighting business, both as manufacturer and supplier, in service for our existing clients for over 15 years.

Thanks to our well-experienced engineering team available in manufacturing plants located in Kazakhstan & China and our know-how acquired through our commercial activities at four continents, eleven countries by cooperating with building designers of many prestigious projects; TEKLED is always at your service for supporting you with your recent future projects.

Beside our retail sales activities through well-known e-commerce portals and own website; we cooperate with our clients, architects, designers and construction companies to provide them complex solutions of lighting and lighting control for public and private spaces; support them to manage procurement and purchasing stages of ongoing projects and tenders; share our expertise at lighting technics, electronics and manufacturing materials for their lighting product design. Clear processes, strict quality standards and our experience as a global lighting manufacturer and supplier make us a reliable partner for projects of any scale and type.



TEKLED


INDOOR



ALZIR A White



ALZIR A Black

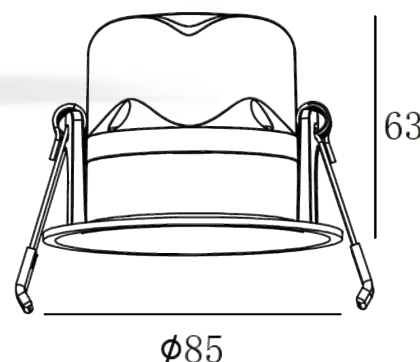


PRODUCT SPECIFICATION


SKU	280-03498
Name	ALZIR A
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



BLACK




GREY



ALZIR R White



ALZIR R Black

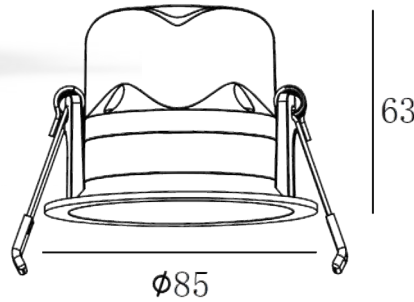

PRODUCT SPECIFICATION

SKU	280-03499
Name	ALZIR R
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



BLACK




GREY



ALZIR S white



ALZIR S black

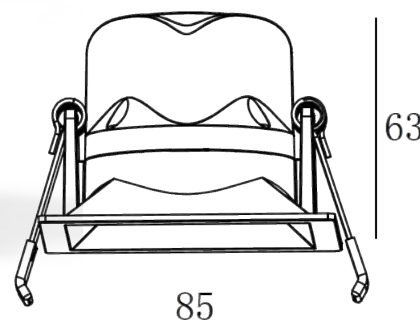


PRODUCT SPECIFICATION


SKU	280-03500
Name	ALZIR S
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



BLACK



GREY



ALZIR RD white



ALZIR RD black

PRODUCT SPECIFICATION

SKU	280-03501
Name	ALZIR RD
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20




WHITE



BLACK




GREY

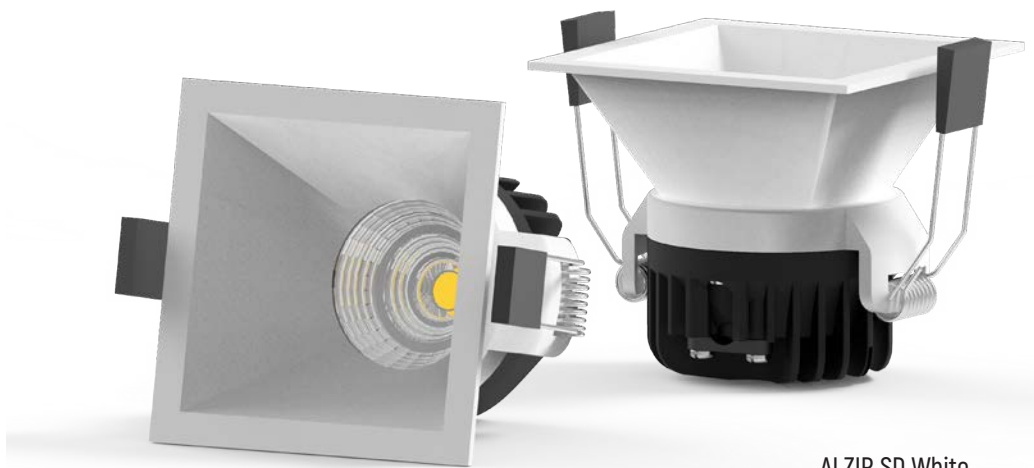

ALZIR SD White



ALZIR SD Black

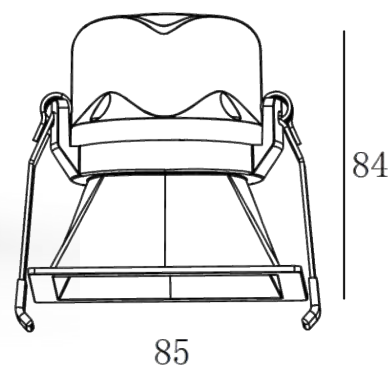


PRODUCT SPECIFICATION


SKU	280-03502
Name	ALZIR SD
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



BLACK



GREY



ANTARES F1



ANTARES F1



PRODUCT SPECIFICATION

SKU	143-03700
Name	ANTARES F1
Material	Steel
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



CHROME



NICKEL

ANTARES



ANTARES F



ANTARES F



PRODUCT SPECIFICATION

SKU	143-03712
Name	ANTARES F
Material	Steel
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



CHROME



NICKEL



ANTARES T



ANTARES T



PRODUCT SPECIFICATION

SKU	143-03718
Name	ANTARES T
Material	Steel
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



CHROME



NICKEL



ARCHER 1 white




ARCHER 2 black



ARCHER 3 white



ARCHER 1

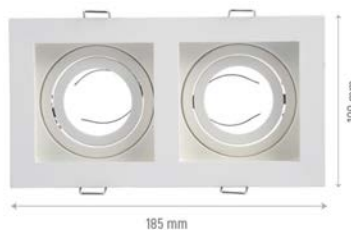

ARCHER 2



ARCHER 3

PRODUCT SPECIFICATION

SKU	165-03872, 165-03874, 165-03876
Name	ARCHER 1 / 2 / 3
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1 / 2 / 3xGU10
Max. Wattage	1 / 2 / 3x35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



GU10



Class I



IP 20



WHITE



BLACK




GREY




ASTRO Back View




ASTRO Front View

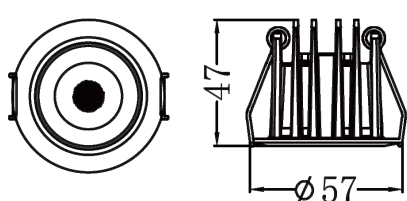


ASTRO 50

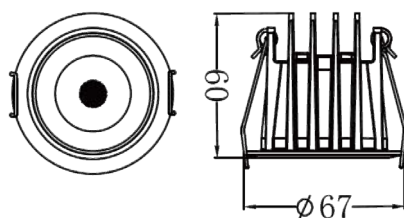


ASTRO 60

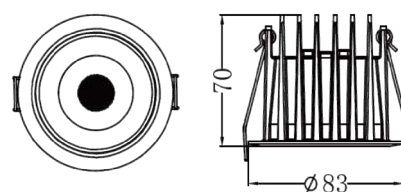

ASTRO 75

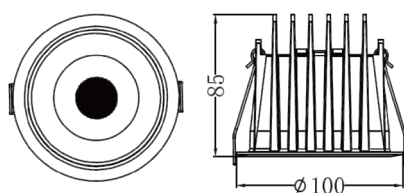

ASTRO 90

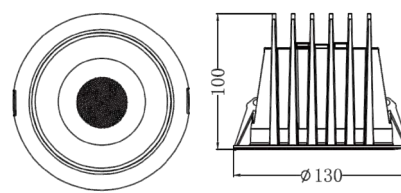


ASTRO 120

PRODUCT SPECIFICATION


SKU	280-03300, 280-03301, 280-03302, 280-03303, 280-03304
Name	ASTRO 50 / 60 / 75 / 90 / 120
Material	Aluminum
Light Source	LED, COB
Wattage	5W, 9W, 12W, 20W, 30W
Beam Angle	15° / 24° / 36°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Lumens	450lm, 810lm, 1080lm, 1800lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




15° / 24° / 36°



IP 44



Class II



50,000 Hr



WHITE



WHITE

BLACK



BLACK


CAELUM




CAELUM white




CAELUM white-black

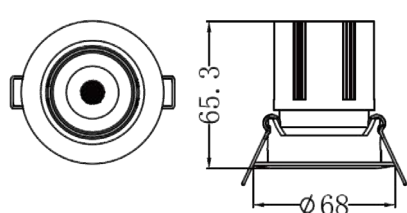


CAELUM 60

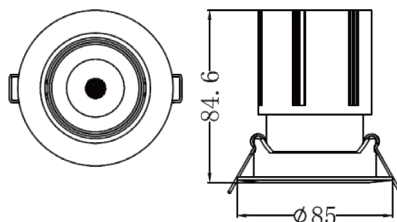

CAELUM 75

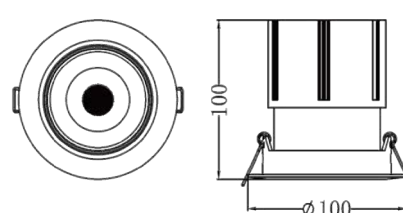

CAELUM 90

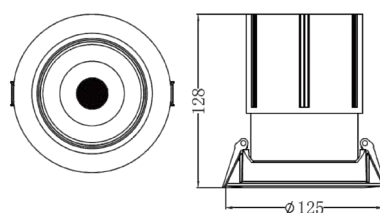


CAELUM 110

PRODUCT SPECIFICATION


SKU	280-03305, 280-03306, 280-03307, 280-03308
Name	CAELUM 60 / 75 / 90 / 110
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 12W, 20W, 30W
Beam Angle	15° / 24° / 36°
Tilt	0°-25°
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Lumens	630lm, 1080lm, 1800lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




15° / 24° / 36°



IP 44



Class II



50.000 Hr



WHITE



WHITE

BLACK




BLACK




CANIS R white-black




CANIS R white-black

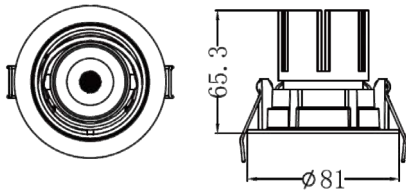


CANIS R 75

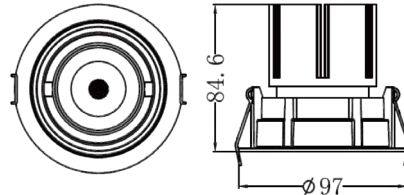

CANIS R 90

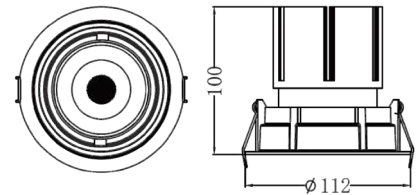

CANIS R 105

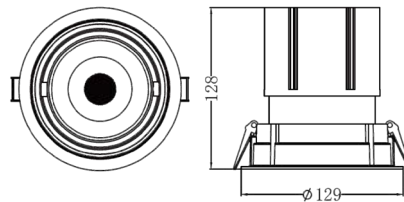

CANIS R 120

PRODUCT SPECIFICATION

SKU	280-03309, 280-03310, 280-03311, 280-03312
Name	CANIS R 75 / 90 / 105 / 120
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 12W, 20W, 30W
Beam Angle	15° / 24° / 36°
Tilt	0°-20°/355°
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Lumens	630lm, 1080lm, 1800lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




15° / 24° / 36°



IP 20



Class I



50.000 Hr



WHITE



WHITE

BLACK




BLACK


CANIS




CANIS S white-black

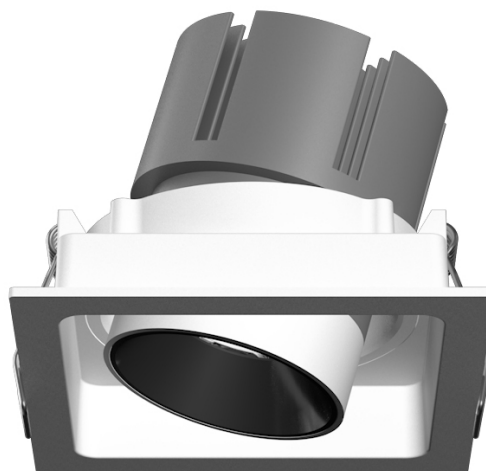


CANIS S white-black

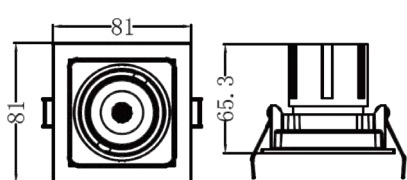


CANIS S 75

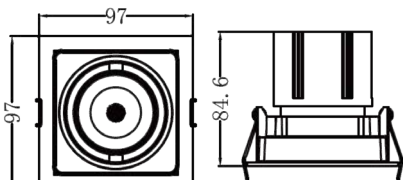

CANIS S 90

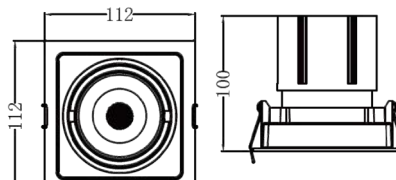

CANIS S 105

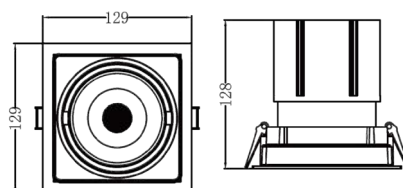

CANIS S 120

PRODUCT SPECIFICATION

SKU	280-03313, 280-03314, 280-03315, 280-03316
Name	CANIS S 75 / 90 / 105 / 120
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 12W, 20W, 30W
Beam Angle	15° / 24° / 36°
Tilt	0°-20°/355°
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Lumens	630lm, 1080lm, 1800lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




15° / 24° / 36°



IP 20



Class I



50.000 Hr



WHITE



WHITE


BLACK




BLACK




CANIS S2 white-black

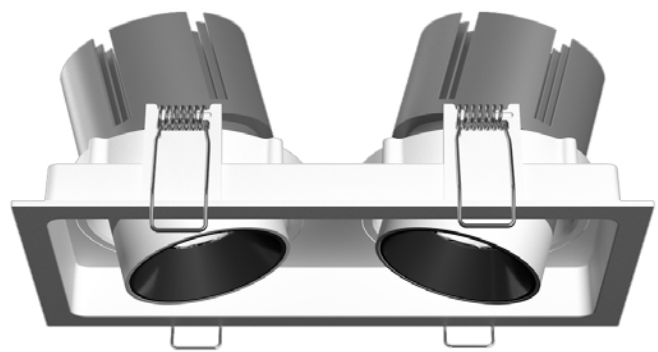


CANIS S2 white-black




CANIS S2 75



CANIS S2 90



CANIS S2 105



CANIS S2 120

PRODUCT SPECIFICATION

SKU	280-03317, 280-03318, 280-03319, 280-03320
Name	CANIS S2 75 / 90 / 105 / 120
Material	Aluminum
Light Source	LED, COB
Wattage	2x7W, 2x12W, 2x20W, 2x30W
Beam Angle	15° / 24° / 36°
Tilt	0°-20°/355°
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Lumens	2x630lm, 2x1080lm, 2x1800lm, 2x2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C




COB




15° / 24° / 36°



IP 20



Class I



50.000 Hr



WHITE



WHITE

BLACK



BLACK


FELIS




FELIS 75 white-chrome



FELIS 95 white-chrome

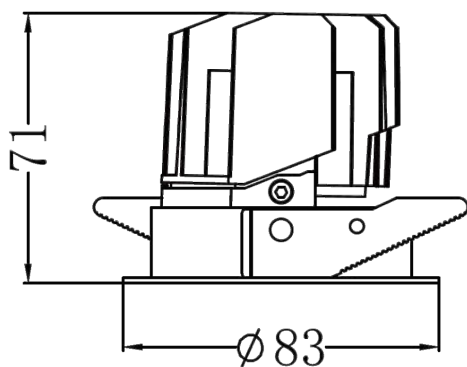

FELIS 75

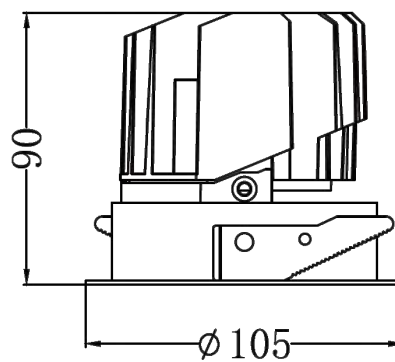

FELIS 95

PRODUCT SPECIFICATION

SKU	280-03364, 280-03365
Name	FELIS 75 / 95
Material	Aluminum
Light Source	LED, COB
Wattage	9W, 15W
Beam Angle	15° / 24° / 36°
Tilt	0°-30°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	810lm, 1350lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




12° / 24° / 36°



IP 20



Class I




50,000 Hr




CHROME




CHROME




FINLAY 2




FINLAY 2.5




FINLAY 3.5




FINLAY 4

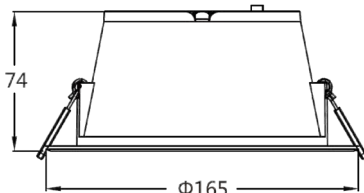

FINLAY 5

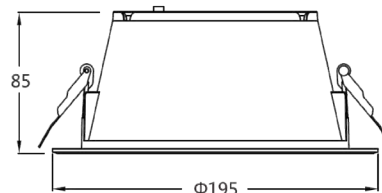

FINLAY 6



FINLAY 8

PRODUCT SPECIFICATION

SKU	280-03366, 280-03367, 280-03368, 280-03369, 280-03370, 280-03371, 280-03372
Name	FINLAY 2 / 3 / 3.5 / 4 / 5 / 6 / 8
Material	Aluminum
Light Source	LED, SMD
Wattage	5W, 7W, 9W, 12W, 15W, 20W, 30W
Beam Angle	60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	550lm, 770lm, 990lm, 1320lm, 1650lm, 2200lm, 3300lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




60°



IP 44



Class II



50.000 Hr



WHITE



CHROME




BLACK




CASTOR 75 O white-black




CASTOR 75 R white-black

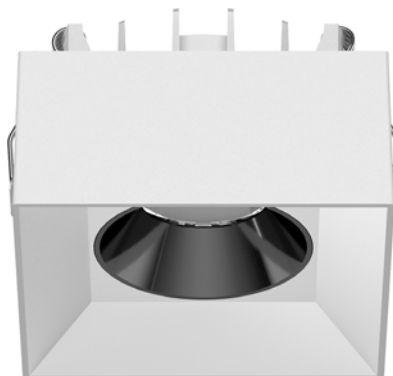


CASTOR S white-black

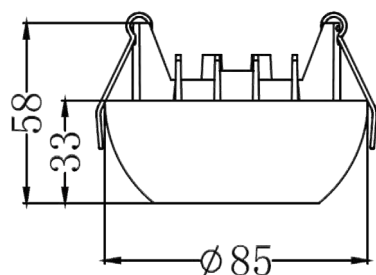

CASTOR 75 O

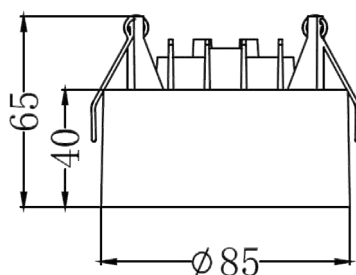

CASTOR 75 R

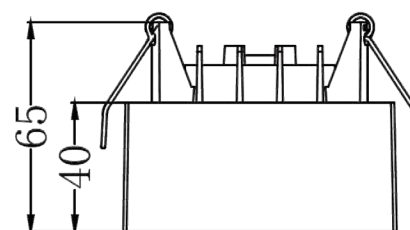

CASTOR 75 S

PRODUCT SPECIFICATION

SKU	280-03321, 280-03322, 280-03323
Name	CASTOR 75 O / R / S
Material	Aluminum
Light Source	LED, COB
Wattage	12W, 10W, 12W
Beam Angle	15° / 24° / 36°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	960lm, 800lm, 960lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




15° / 24° / 36°



IP 44



Class II



50.000 Hr



WHITE



WHITE

BLACK



BLACK




DARA 25 white-black




DARA 35 white-black




DARA 50 white-black

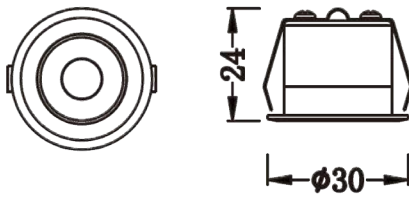

DARA 25

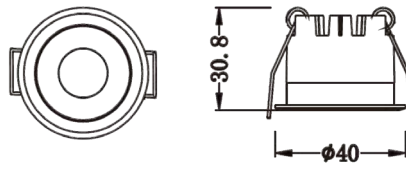

DARA 35

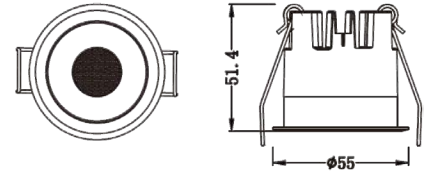

DARA 50

PRODUCT SPECIFICATION

SKU	280-03360, 280-03361, 280-03362
Name	DARA 25 / 35 / 50
Material	Aluminum
Light Source	LED, SMD
Wattage	1.5W, 2.5W, 3.5W
Beam Angle	15° / 30° / 60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	95lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	140lm, 230lm, 330lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



15° / 30° / 60°



IP 44



Class II



50.000 Hr



WHITE



WHITE

BLACK




BLACK




CYRUS L 1 white-black




CYRUS L 2 white-black

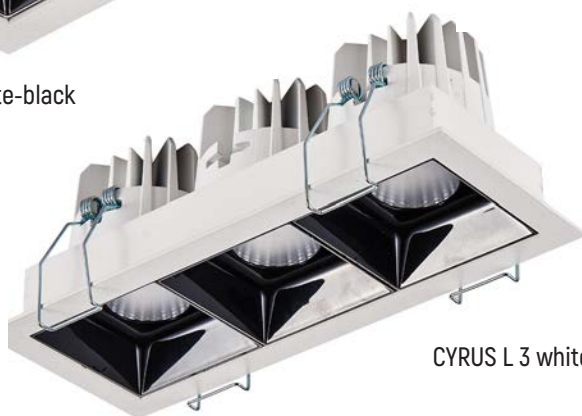




CYRUS L 3 white-black



CYRUS L 1



CYRUS L 2



CYRUS L 3



PRODUCT SPECIFICATION

SKU	280-03351, 280-03352, 280-03353
Name	CYRUS L 1 / 2 / 3
Material	Aluminum
Light Source	LED, COB
Wattage	10W, 20W, 30W
Beam Angle	15° / 30° / 45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	70lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	700lm, 1400lm, 2100lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




15° / 30° / 45°



IP 20



Class I



50.000 Hr




WHITE

BLACK



BLACK

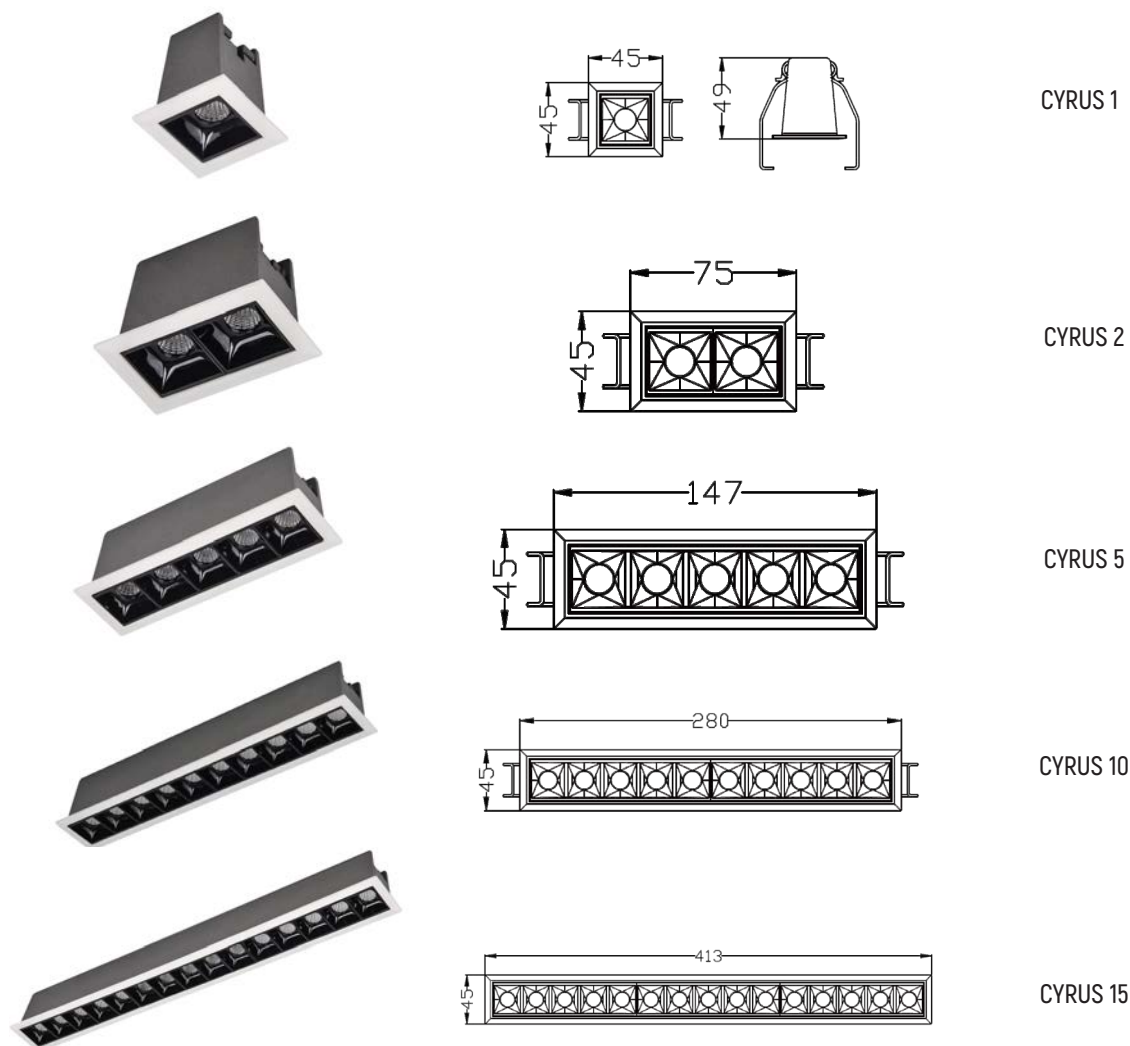

PRODUCT SPECIFICATION

SKU	280-03340, 280-03341, 280-03342, 280-03343, 280-03344
Name	CYRUS 1 / 2 / 5 / 10 / 15
Material	Aluminum
Light Source	LED, SMD
Wattage	2W, 4W, 10W, 20W, 30W
Beam Angle	15° / 30° / 45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	210lm, 420lm, 1050lm, 2100lm, 3150lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C




SMD




15° / 30° / 45°



IP 20



Class I




50,000 Hr



WHITE
BLACK

BLACK
BLACK


CYRUS




CYRUS T 1




CYRUS T 2



CYRUS T 5

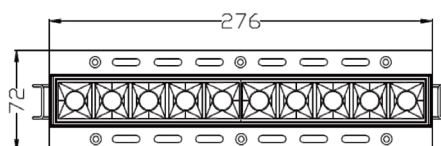

CYRUS T 10



CYRUS T 15

PRODUCT SPECIFICATION

SKU	280-03345, 280-03346, 280-03347, 280-03348, 280-03349
Name	CYRUS T 1 / 2 / 5 / 10 / 15
Material	Aluminum
Light Source	LED, SMD
Wattage	2W, 4W, 10W, 20W, 30W
Beam Angle	15° / 30° / 45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	210lm, 420lm, 1050lm, 2100lm, 3150lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



SMD




15° / 30° / 45°



IP 20



Class I



50.000 Hr



WHITE

BLACK



BLACK




CITLALI 6 white-black




CITLALI 12 white-black




CITLALI 18 white-black



CITLALI 6



CITLALI 12



CITLALI 18

PRODUCT SPECIFICATION

SKU	280-03324, 280-03325, 280-03326
Name	CITLALI 6 / 12 / 18
Material	Aluminum
Light Source	LED, SMD
Wattage	8W, 15W, 20W
Beam Angle	20° / 34° / 48°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	70lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	560lm, 1050lm, 1400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



SMD




20° / 34° / 48°



IP 20



Class I



50.000 Hr



WHITE

BLACK




BLACK

CITLALI




CITLALI GD 12 white-black

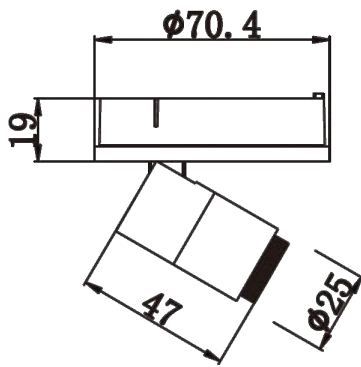

CITLALI GD 12



CITLALI 12 + CITLALI GD 12

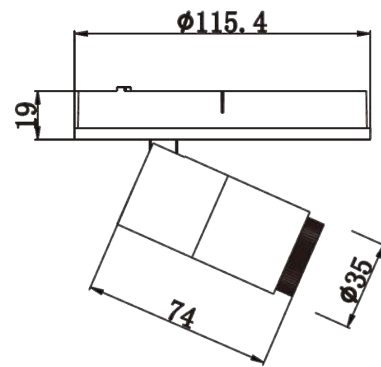

CITLALI GD 18

PRODUCT SPECIFICATION

SKU	280-03327, 280-03328
Name	CITLALI GD 12 / 18
Material	Aluminum
Light Source	LED, COB
Wattage	3W, 8W
Beam Angle	20° / 50°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	95lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	280lm, 760lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB



20° / 50°



IP 20



Class I



50.000 Hr





BLACK



BLACK





CITLALI TD 12 white



CITLALI TD 12



CITLALI 12 + CITLALI TD 12



CITLALI TD 18

PRODUCT SPECIFICATION

SKU	280-03330, 280-03331
Name	CITLALI TD 12 / 18
Material	Aluminum
Light Source	LED, SMD
Wattage	7W, 10W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	730lm, 1050lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE





BLACK

CITLALI





CITLALI SD 12 white-black



CITLALI SD 12



CITLALI 12 + CITLALI SD 12



CITLALI SD 18

PRODUCT SPECIFICATION

SKU	280-03333, 280-03334
Name	CITLALI SD 12 / 18
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 12W
Beam Angle	12° / 24° / 36°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	95lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	660lm, 1140lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




12° / 24° / 36°



IP 44



Class II



50,000 Hr



WHITE

BLACK



BLACK




HOKU white




HOKU Back View




HOKU Front View



HOKU 4



HOKU 5



HOKU 6

PRODUCT SPECIFICATION

SKU	280-03373, 280-03374, 280-03375
Name	HOKU 4 / 5 / 6
Material	Aluminum, Polycarbonate
Light Source	LED, COB
Wattage	15W, 30W, 40W
Beam Angle	24°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	1570lm, 3150lm, 4200lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




24°



IP 20



Class I



50.000 Hr



WHITE



BLACK




GREY



INDUS 85



INDUS 120



INDUS 170



INDUS 220



INDUS 300

PRODUCT SPECIFICATION

SKU	165-03600, 165-03604, 165-03608, 165-03612, 165-036178
Name	INDUS 85 / 120 / 170 / 220 / 300
Material	Aluminum
Light Source	LED, SMD
Wattage	3W, 6W, 12W, 18W, 24W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	85lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	250lm, 510lm, 1020lm, 1530lm, 2040lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 44



Class II



50.000 Hr



WHITE



BLACK



GREY



ITRI 6060



ITRI 60120



ITRI 6060



ITRI 60120

PRODUCT SPECIFICATION

SKU	165-038400, 165-038404
Name	ITRI 6060 / 60120
Material	Aluminum
Light Source	LED, SMD
Wattage	38W, 58W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	3990lm, 6090lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP44
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 44



Class II



50,000 Hr



WHITE




GREY



ANODIZED ALUMINUM

IZAR

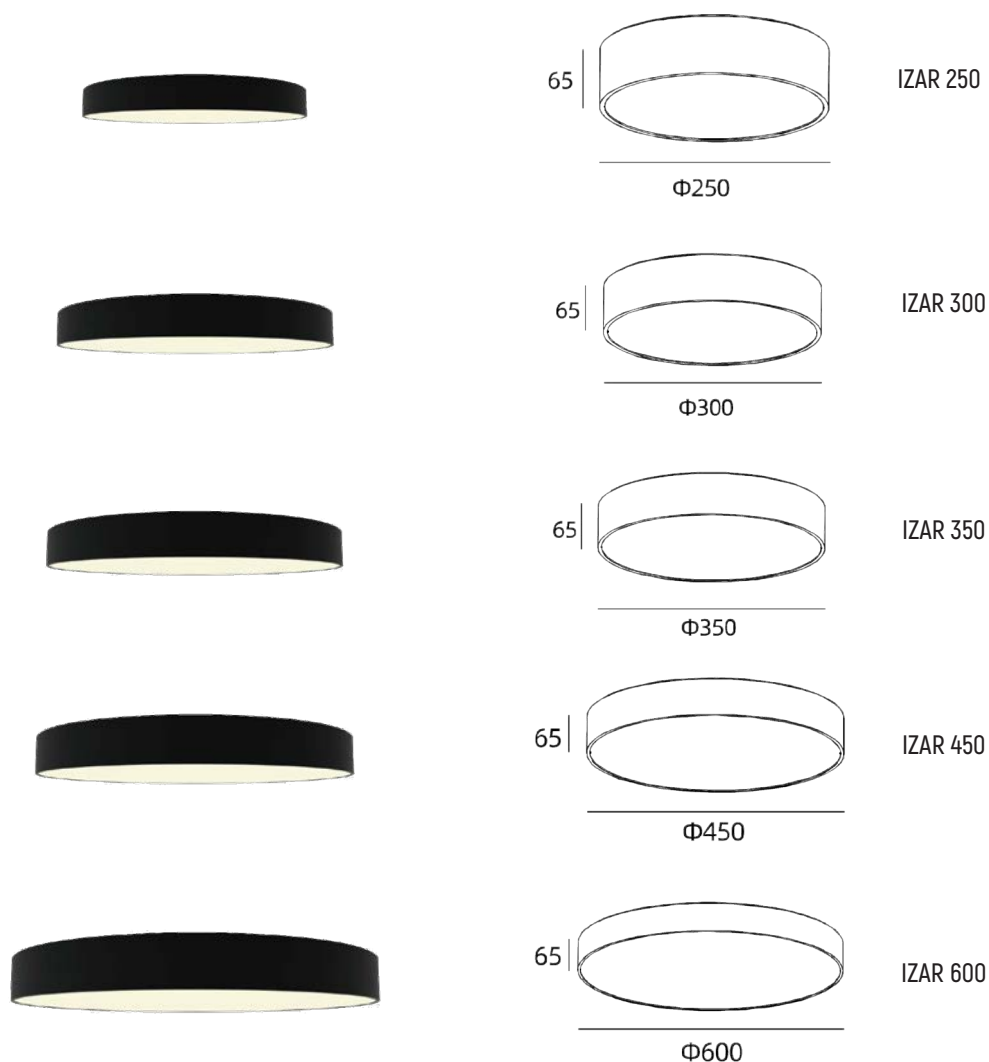

PRODUCT SPECIFICATION

SKU	280-03456, 280-03457, 280-03458, 280-03459, 280-03460
Name	IZAR 250 / 300 / 350 / 450 / 600
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	22W, 27W, 32W, 48W, 54W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	2420lm, 2970lm, 3520lm, 5280lm, 5940lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE







BLACK



GREY



NAMID black

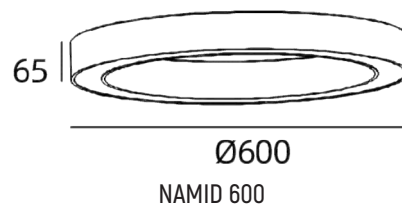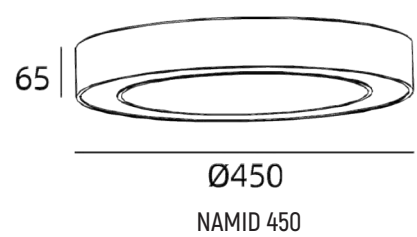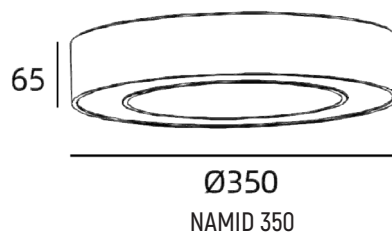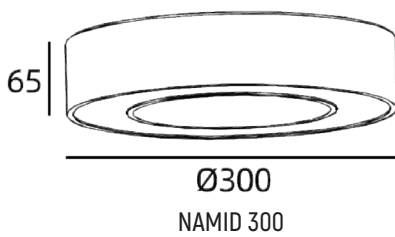

PRODUCT SPECIFICATION

SKU	280-03468, 280-03469, 280-03470, 280-03471
Name	NAMID 300 / 350 / 450 / 600
Material	Aluminum, Polycarbonate
Light Source	LED , SMD
Wattage	27W, 32W, 43W, 54W
Beam Angle	120°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Lumens	2970lm, 3520lm, 4730lm, 5940lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY

LEO




LEO 200 black




LEO 250 black




LEO 300 black

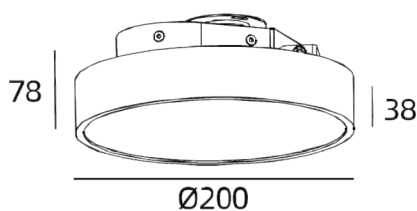

LEO 200

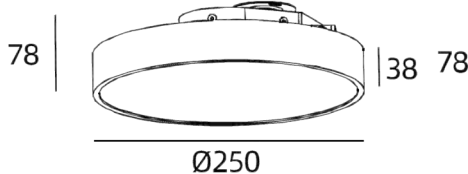

LEO 250

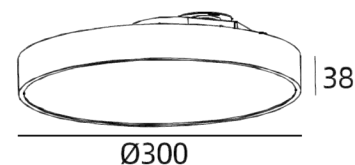

LEO 300

PRODUCT SPECIFICATION

SKU	280-03461, 280-03462, 280-03463
Name	LEO 200 / 250 / 300
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	18W, 22W, 26W
Beam Angle	120°
Tilt	0°-45°/355°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1980lm, 2420lm, 2860lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr





WHITE




BLACK




GREY

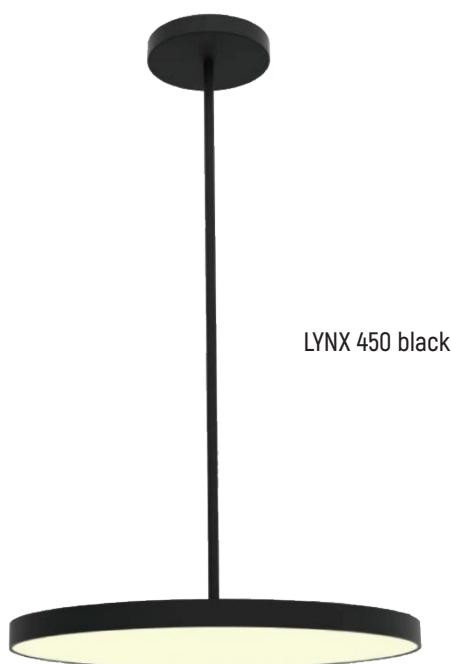


LYNX 450



LYNX 600



LYNX 900




LYNX 1000

PRODUCT SPECIFICATION


SKU	280-03464, 280-03465, 280-03466, 280-03467
Name	LYNX 450 / 600 / 900 / 1000
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	43W, 52W, 72W, 82W
Beam Angle	120°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Lumens	4730lm, 5720lm, 7920lm, 9020lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY

NASHI




NASHI 120 black




NASHI 200




NASHI 300



NASHI 120



NASHI 200



NASHI 300

PRODUCT SPECIFICATION

SKU	280-03472, 280-03473, 280-03474
Name	NASHI 120 / 200 / 300
Material	Aluminum
Light Source	LED, COB
Wattage	8W, 11W, 13W
Beam Angle	15° / 25° / 38° / 60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	720lm, 990lm, 1170lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C




COB




15° / 25° / 38° / 60°



IP 20



Class I



50.000 Hr



WHITE



BLACK



GREY




NAVI 120 black




NAVI 300 black




NAVI 200 black



NAVI 120



NAVI 200



NAVI 300

PRODUCT SPECIFICATION

SKU	280-03475, 280-03476, 280-03477
Name	NAVI 120 / 200 / 300
Material	Aluminum
Light Source	LED, COB
Wattage	8W, 11W, 13W
Beam Angle	15° / 25° / 38° / 60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	720lm, 990lm, 1170lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




15° / 25° / 38° / 60°



IP 20



Class I



50.000 Hr



WHITE



BLACK



GREY

ORION



ORION Details



ORION Front View



ORION Details



ORION 235



ORION 285



ORION 335

PRODUCT SPECIFICATION

SKU	121-03980, 121-03986, 121-03992
Name	ORION 235 / 285 / 335
Material	Steel, PMMA
Light Source	LED, SMD
Wattage	12W, 18W, 24W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	960lm, 1440lm, 1920lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



Dimensions : W: 205mm / H: 75.5mm / L: 1186mm

PRODUCT SPECIFICATION

SKU	280-03385
Name	PAVO
Material	Steel, PMMA
Light Source	LED, SMD
Wattage	72W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	7920lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C
Dimensions	W: 205mm / H: 75.5mm / L: 1186mm



SMD



120°



IP 40



Class II




50.000 Hr




WHITE

PHOENIX

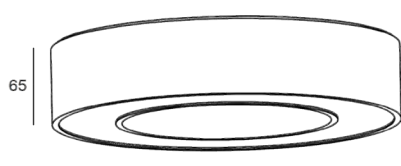


Ø300

PHOENIX 300

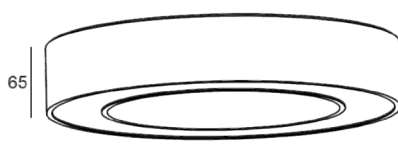


Ø350

PHOENIX 350

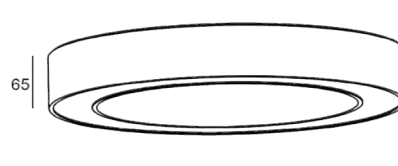

Ø450

PHOENIX 450

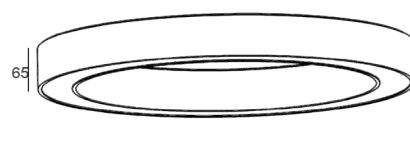

Ø600


PHOENIX 600

PRODUCT SPECIFICATION


SKU	280-03480, 280-03481, 280-03482, 280-03483
Name	PHOENIX 300 / 350 / 450 / 600
Material	Aluminum, Polycarbonate
Light Source	LED , SMD
Wattage	27W, 32W, 43W, 54W
Beam Angle	120°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Lumens	2970lm, 3520lm, 4730lm, 5940lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY



Dimensions : W: 39mm / H: 60mm / L: 1204mm

PRODUCT SPECIFICATION

SKU	280-03490
Name	POLLUX
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	36W
Beam Angle	15° / 30° / 45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C
Dimensions	W: 39mm / H: 60mm / L: 1204mm



SMD



15° / 30° / 45°



IP 20



Class I



50.000 Hr



WHITE

BLACK



BLACK

PYXIS



Dimensions : W: 52mm / H: 72mm / L: 1189mm

PRODUCT SPECIFICATION

SKU	280-03491
Name	PYXIS
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	36W
Beam Angle	15° / 30° / 45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



SMD




15° / 30° / 45°



IP 20



Class I



50,000 Hr



WHITE

BLACK



BLACK



Dimensions : Ø62mm / L: 1208mm

PRODUCT SPECIFICATION

SKU	280-03492
Name	RASALAS
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	36W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY



ANODIZED ALUMINUM

RASTABAN



Dimensions : W: 80mm / H: 38mm / L: 1175mm

PRODUCT SPECIFICATION

SKU	280-03493
Name	RASTABAN
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	36W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY



ANODIZED ALUMINUM



Dimensions : W: 60mm / H: 80mm / L: 1175mm

PRODUCT SPECIFICATION

SKU	280-03494
Name	REGULUS
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	36W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY



ANODIZED ALUMINUM

RIGEL



Dimensions : W: 39mm / H: 60mm / L: 1180mm

PRODUCT SPECIFICATION

SKU	280-03495
Name	RIGEL
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	36W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY

ANODIZED
ALUMINUM



Dimensions : W: 200mm / H: 55mm / L: 1200mm

PRODUCT SPECIFICATION

SKU	280-03496
Name	SABIK
Material	Steel, PMMA
Light Source	LED, SMD
Wattage	36W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY



ANODIZED ALUMINUM

SAMSON



SAMSON white

SAMSON 70: Ø70x100mm


SAMSON 90: Ø90x120mm

PRODUCT SPECIFICATION

SKU	280-03485, 280-03486
Name	SAMSON 70 / 90
Material	Aluminum, PMMA
Light Source	LED, COB
Wattage	20W, 30W
Beam Angle	15° / 24° / 40°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	1800lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




12° / 24° / 40°



IP 20



Class I



50.000 Hr



WHITE



BLACK



GREY



SCORPIUS 90 white

SCORPIUS 90: Ø89x232mm



SCORPIUS 100 white


SCORPIUS 100: Ø100x232mm

PRODUCT SPECIFICATION

SKU	280-03487, 280-03488
Name	SCORPIUS 90 / 100
Material	Aluminum, PMMA
Light Source	LED, COB
Wattage	25W, 30W
Beam Angle	15° / 24° / 40°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	2250lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




12° / 24° / 40°



IP 20



Class I



50.000 Hr



WHITE



BLACK



GREY




SOLARIS 56 white




SOLARIS 75 white



SOLARIS 65 black



SOLARIS 56



SOLARIS 65



SOLARIS 75

PRODUCT SPECIFICATION

SKU	280-03403, 280-03404, 280-03405
Name	SOLARIS 56 / 65 / 75
Material	Aluminum
Light Source	LED, COB
Wattage	14W, 18W, 30W
Beam Angle	15° / 24° / 36° / 60°
Tilt	0°-90°/355°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	1120lm, 1440lm, 2400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C



COB




15° / 24° / 36° / 60°



IP 20



Class I



50.000 Hr



WHITE



BLACK



GREY




SAL white-black




SAL Back View




SAL black



SAL 60



SAL 80



SAL 90

PRODUCT SPECIFICATION

SKU	280-03406, 280-03407, 280-03408
Name	SAL 60 / 80 / 90
Material	Aluminum, Polycarbonate
Light Source	LED, COB
Wattage	10W, 20W, 30W
Beam Angle	15° / 24° / 38°
Tilt	0°-90°/355°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	900lm, 1800lm, 2700lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP20
IK	N/A
Class	Class I
Operation Temp.	-25° ~ +55°C




COB




15° / 24° / 38°



IP 20



Class I



50.000 Hr



WHITE



WHITE

BLACK




BLACK




SIRIUS 200 black



SIRIUS 200 white

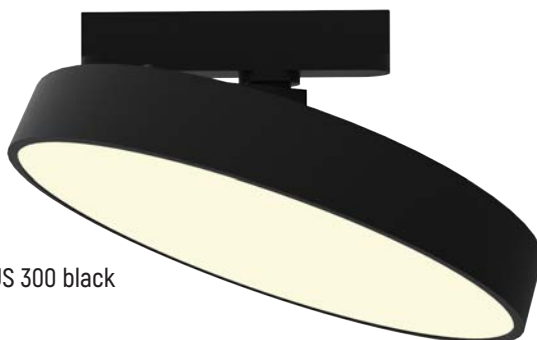


SIRIUS 300 black




Ø200

SIRIUS 200



Ø250

SIRIUS 250

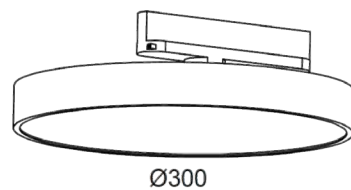

Ø300

SIRIUS 300

PRODUCT SPECIFICATION

SKU	280-03400, 280-03401, 280-03402
Name	SIRIUS 200 / 250 / 300
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	18W, 22W, 26W
Beam Angle	120°
Tilt	0°-45°/355°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1980lm, 2420lm, 2860lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP40
IK	N/A
Class	Class Iy
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 40



Class II



50.000 Hr



WHITE



BLACK



GREY

OUTDOOR



ALULA



PRODUCT SPECIFICATION


SKU	143-03706
Name	ALULA
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



GU10



Class II



IP 65



WHITE



CHROME



NICKEL

ALYA



ALYA white



ALYA bronze



PRODUCT SPECIFICATION

SKU	143-03730
Name	ALYA
Material	Aluminum
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



GU10



Class II



IP 65



WHITE



CHROME



BRONZE




AQUILA white-black




AQUILA white-chrome




AQUILA white-gold

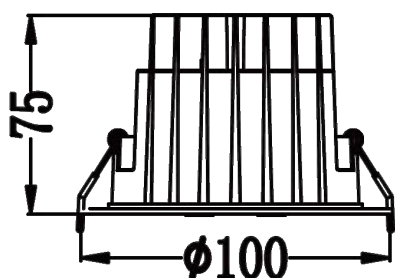


AQUILA 3

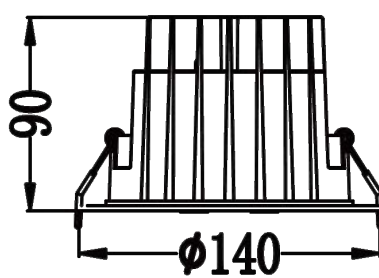

AQUILA 4

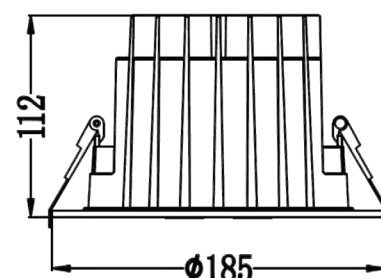

AQUILA 6



AQUILA 8

PRODUCT SPECIFICATION

SKU	280-03390, 280-03391, 280-03392, 280-03393
Name	AQUILA 3 / 4 / 6 / 8
Material	Aluminum
Light Source	LED, COB
Wattage	10W, 20W, 30W, 40W
Beam Angle	45° / 50° / 60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	85lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	850lm, 1700lm, 2550lm, 3400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




45° / 50° / 60°



IP 54



Class II



50.000 Hr



WHITE



CHROME



GOLD



BLACK



CHROME




GOLD




ARES Front View




ARES Back View




ARES 3




ARES 4



ARES 5



ARES 6




ARES 8

PRODUCT SPECIFICATION


SKU	280-03394, 280-03395, 280-03396, 280-03397, 280-03398
Name	ARES 3 / 4 / 5 / 6 / 8
Material	Aluminum
Light Source	LED, SMD
Wattage	10W, 15W, 25W, 40W, 60W
Beam Angle	50°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Lumens	1050lm, 1580lm, 2620lm, 4200lm, 6300lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




50°



IP 54



Class II



50,000 Hr



WHITE



BLACK



GREY


ASTREA




ASTREA S grey



ASTREA R grey



ASTREA S



ASTREA R

PRODUCT SPECIFICATION


SKU	280-03600, 280-03601
Name	ASTREA S / R
Material	Aluminum
Light Source	E27 bulb
Lamp Holder	1xE27
Max. Wattage	40W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP54
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



E27



Class II



IP 54



WHITE




BLACK



GREY



ATRIA grey



PRODUCT SPECIFICATION

SKU	280-03603
Name	ATRIA
Material	Aluminum
Light Source	GX53 bulb
Lamp Holder	1xGX53
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP54
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



GX53



Class II



IP 54



WHITE



BLACK



GREY

CARINA



CARINA 1XX



CARINA 2XX


Dimensions

"W: 66 mm [S], 102 mm [D] E: 73 mm


L: 664 mm [X18], 1272 mm [X36], 1572 mm [X58]"

PRODUCT SPECIFICATION

SKU	280-03613, 280-03614, 280-03615, 280-03616, 280-03617, 280-03618
Name	CARINA 118 / 218 / 136 / 236 / 158 / 258
Material	Polycarbonate
Light Source	G13 LEDtube
Lamp Holder	1xG13 / 2xG13
Max. Wattage	1x9W / 2x9W / 1x18W / 2x18W / 1x24W / 2x24W
Beam Angle	120°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP65
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



G13 LEDtube



Class II



IP 65



GREY



ELECTRA 1XX

ELECTRA 2XX

Dimensions

"W: 105 mm (S), 140 mm (D) E: 98 mm
L: 675 mm (X18),
1285 mm (X36), 1585 mm (X58)"

PRODUCT SPECIFICATION

SKU	280-03642, 280-03643, 280-03644, 280-03645, 280-03646, 280-03647
Name	ELECTRA 118 / 218 / 136 / 236 / 158 / 258
Material	Aluminum, Glass
Light Source	G13 LEDtube
Lamp Holder	1xG13 / 2xG13
Max. Wattage	1x9W / 2x9W / 1x18W / 2x18W / 1x24W / 2x24W
Beam Angle	120°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP65
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



G13 LEDtube



Class II



IP 65




GREY

ESTELLA




ESTELLA white-black



ESTELLA 3




ESTELLA white-chrome




ESTELLA 4



ESTELLA white-gold



ESTELLA 6



ESTELLA 8

PRODUCT SPECIFICATION

SKU	280-03680, 280-03681, 280-03682, 280-03683
Name	ESTELLA 3 / 4 / 6 / 8
Material	Aluminum
Light Source	LED, COB
Wattage	10W, 20W, 30W, 40W
Beam Angle	45° / 50° / 60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	85lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	850lm, 1700lm, 2550lm, 3400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




45° / 50° / 60°



IP 54



Class II



50.000 Hr



WHITE




CHROME



GOLD



BLACK




BLACK CHROME



BLACK GOLD



ETOILE black



PRODUCT SPECIFICATION

SKU	280-03684
Name	ETOILE
Material	Aluminum
Light Source	LED, COB
Wattage	18W
Beam Angle	44°
Tilt	N/A
Lumens	1440lm
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




44°



IP 54



Class II



50.000 Hr



WHITE



BLACK




GREY

HELENE



HELENE C black




PRODUCT SPECIFICATION


SKU	280-03685
Name	HELENE C
Material	Aluminum
Light Source	LED, COB
Wattage	12W
Beam Angle	10° / 44°
Tilt	N/A
Lumens	960lm
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




10° / 44°



IP 54



Class II



50.000 Hr



WHITE




BLACK



GREY



HESPER C black



PRODUCT SPECIFICATION

SKU	280-03686
Name	HESPER C
Material	Aluminum
Light Source	LED, COB
Wattage	12W
Beam Angle	10° / 44°
Tilt	N/A
Lumens	960lm
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB



10° / 44°



IP 54



Class II



50.000 Hr



WHITE



BLACK



GREY

HINATA




HINATA, Ø220 x 49 mm

PRODUCT SPECIFICATION


SKU	280-03664
Name	HINATA
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	15W
Beam Angle	120°
Tilt	N/A
Lumens	1650lm
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



WHITE



HASHI, 315 x 315 x 95 mm

PRODUCT SPECIFICATION

SKU	280-03666
Name	HASHI
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	30W
Beam Angle	120°
Tilt	N/A
Lumens	3600lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 65



Class II



50.000 Hr



WHITE

NOVA



NOVA 01



NOVA 02



NOVA R

W: 120 mm / D: 51 mm / L: 200 mm (NOVA 01)

W: 150 mm / 56 mm / 270 mm (NOVA 02)


Ø250 mm x 60 mm (NOVA R)

PRODUCT SPECIFICATION

SKU	280-03650, 280-03651, 280-03652
Name	NOVA 01 / 02 / R
Material	Polycarbonate
Light Source	LED, SMD
Wattage	12W, 12W, 15W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	135lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1560lm, 1560lm, 1950lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



WHITE



BLACK

PHOEBE



PHOEBE Front View



PHOEBE Back View



PHOEBE Details

Ø252 x 71 mm (PHOEBE 250)

Ø354 x 71 mm (PHOEBE 350)

Ø452 x 81 mm (PHOEBE 450)

PRODUCT SPECIFICATION

SKU	280-03653, 280-03654, 280-03655
Name	PHOEBE 250 / 350 / 450
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	10W, 20W, 40W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	100lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1000lm, 2000lm, 4000lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



WHITE

REALTA



REALTA Front View

Ø350 x 125 mm (REALTA 350)



REALTA Details


Ø430 x 135 mm (REALTA 430)

PRODUCT SPECIFICATION

SKU	280-03656, 280-03657
Name	REALTA 350 / 430
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	12W, 12W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	115lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1380lm, 1380lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK10
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr




WHITE



DELPHINUS SQ1



DELPHINUS SQ2

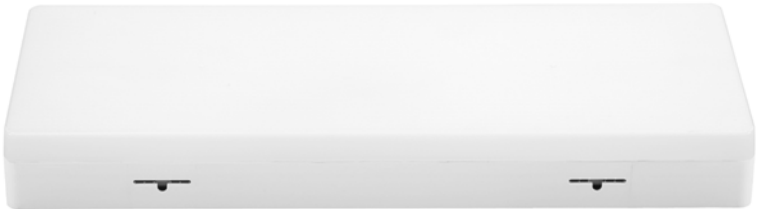

DELPHINUS RC

250 x 250 x 41 mm (DELPHINUS SQ1)

250 x 250 x 41 mm (DELPHINUS SQ2)

210 x 550 x 64 mm (DELPHINUS RC)

PRODUCT SPECIFICATION

SKU	280-03660, 280-03661, 280-03662
Name	DELPHINUS SQ1 / SQ2 / RC
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	10W, 20W, 30W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1200lm, 2400lm, 3600lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54




Class II



50.000 Hr




WHITE

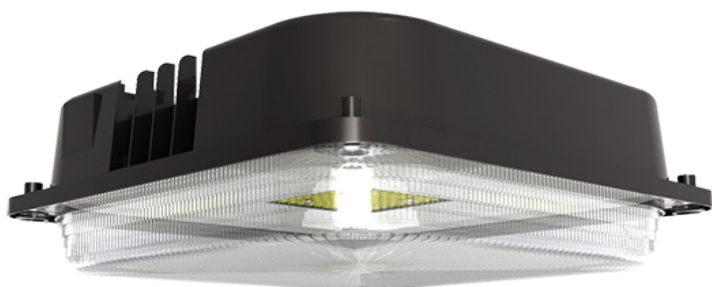


MAIA




MAIA Back View

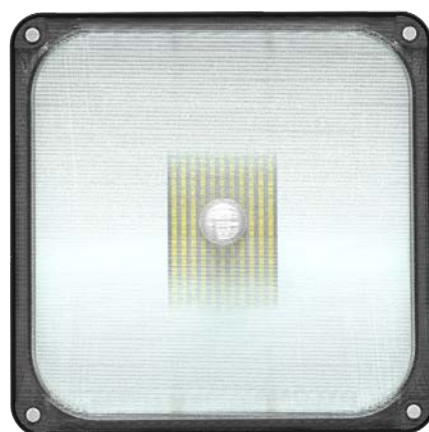


MAIA Front View



MAIA A



MAIA B




MAIA C

PRODUCT SPECIFICATION

SKU	280-03696, 280-03697, 280-03698
Name	MAIA A / B / C
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	50W, 60W, 70W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	6000lm, 7200lm, 8400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 66



Class II




50.000 Hr



WHITE




BLACK

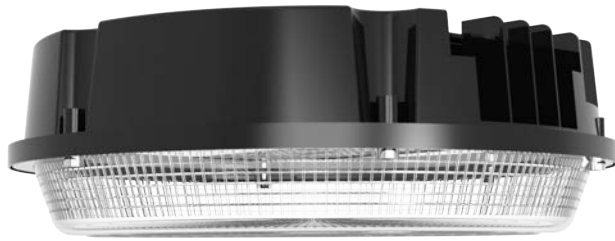

MEISSA



MEISSA Front View

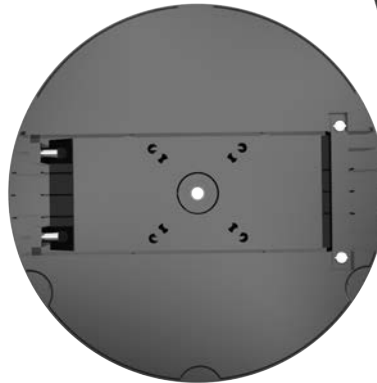

MEISSA Back View



MEISSA A



MEISSA B



MEISSA C

PRODUCT SPECIFICATION

SKU	280-03699, 280-03700, 280-03701
Name	MEISSA A / B / C
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	50W, 60W, 70W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	6000lm, 7200lm, 8400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 66



Class II



50.000 Hr



WHITE




BLACK

LYRA




LYRA surface

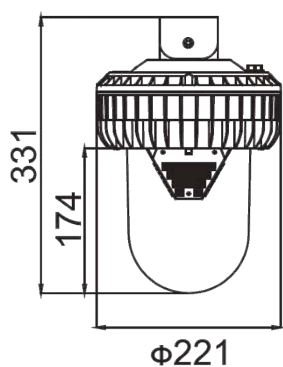

LYRA surface



LYRA pendant

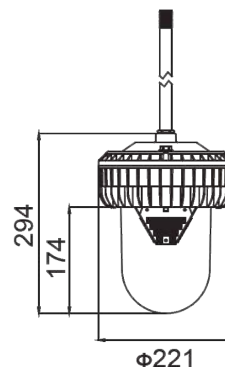

LYRA pendant

PRODUCT SPECIFICATION

SKU	280-03702, 280-03703
Name	LYRA A / B
Material	Aluminum, Glass
Light Source	LED, SMD
Wattage	40W, 60W
Beam Angle	220°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	4800lm, 7200lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 66



Class II



50,000 Hr



WHITE



BLACK



GREY



MIRAM 1XX



MIRAM 2XX

Dimensions : "W: 69 mm (S), 99 mm (D) E: 72 mm L: 600 mm (X18), 1200 mm (X36), 1500 mm (X58)"

PRODUCT SPECIFICATION

SKU	280-03620, 280-03621, 280-03622, 280-03623, 280-03624, 280-03625
Name	MIRAM 118 / 218 / 136 / 236 / 158 / 258
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	12W, 24W, 24W, 48W, 30W, 60W
Beam Angle	120°
Tilt	N/A
Lumens	1680lm, 3360lm, 3360lm, 6720lm, 4200lm, 8400lm
Efficacy	140lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



GREY



NAJIMA 1XX



NAJIMA 2XX

Dimensions : "W: 62 mm (S), 82 mm (D) E: 63.5 mm L: 540 mm (X18), 1140 mm (X36), 1440 mm (X58)"

PRODUCT SPECIFICATION


SKU	280-03626, 280-03627, 280-03628, 280-03629, 280-03630, 280-03631
Name	NAJIMA 118 / 218 / 136 / 236 / 158 / 258
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	10W, 20W, 20W, 40W, 24W, 48W
Beam Angle	120°
Tilt	N/A
Lumens	1200lm, 2400lm, 2400lm, 4800lm, 2880lm, 5760lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



GREY




NASHIA



NASHIA Details



NASHIA Back View

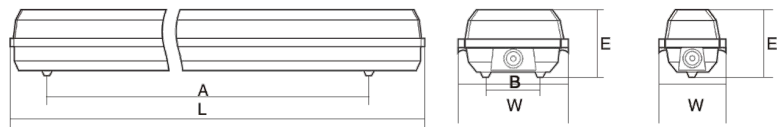

W: 64 mm / E: 65.5 mm / L: 608 mm (60), 1208 mm (120), 1508 mm (150)

PRODUCT SPECIFICATION

SKU	280-03632, 280-03633, 280-03634
Name	NASHIA 60 / 120 / 150
Material	Polycarbonate
Light Source	LED, SMD
Wattage	14W, 28W, 35W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1540lm, 3080lm, 3850lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



WHITE


DANICA






DANICA



DANICA Details

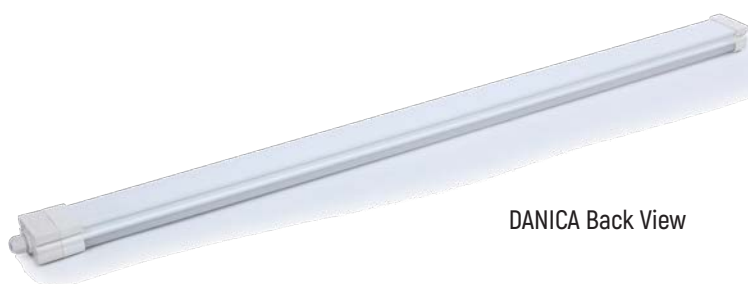

DANICA Back View

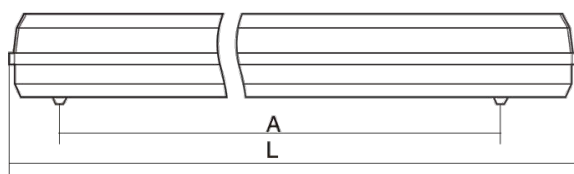

W: 70 mm / E: 47 mm / L: 639 mm [60], 1239 mm [120], 1539 mm [150]

PRODUCT SPECIFICATION

SKU	280-03637, 280-03638, 280-03639
Name	DANICA 60 / 120 / 150
Material	Polycarbonate
Light Source	LED, SMD
Wattage	10W, 20W, 24W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1100lm, 2200lm, 2600lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr




WHITE



CELESTE Front View



CELESTE Back View

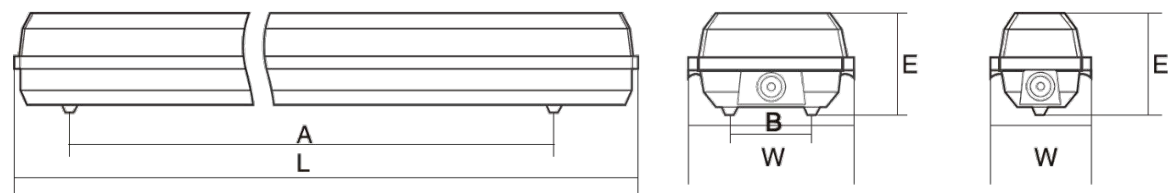

W: 105 mm / E: 98 mm / L: 580 mm (60), 1100 mm (120)

PRODUCT SPECIFICATION

SKU	280-03635, 280-03636
Name	CELESTE 60 / 120
Material	Aluminum, Glass
Light Source	LED, SMD
Wattage	20W, 40W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	2200lm, 4400lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 65



Class II



50,000 Hr



GREY



TARAK, 123.5 x 105 x 176 mm

PRODUCT SPECIFICATION

SKU	280-03816
Name	TARAK
Material	ABS, Glass
Light Source	LED, SMD
Wattage	8W
Beam Angle	120°
Tilt	N/A
Lumens	840lm
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



GREY




AURIGA black




AURIGA black + PC shade




AURIGA grey + PC shade




AURIGA 220 + PC shade



AURIGA 265 + PC shade

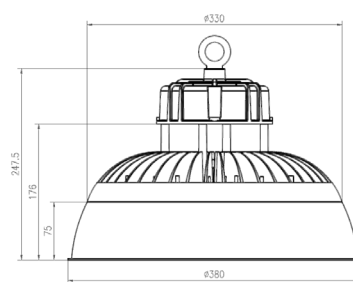

AURIGA 330 + PC shade



AURIGA 390 + PC shade

PRODUCT SPECIFICATION


SKU	280-03710, 280-03711, 280-03712, 280-03713
Name	AURIGA 220 / 265 / 330 / 390
Material	Aluminum
Light Source	LED, SMD
Wattage	60W, 100W, 150W, 200W
Beam Angle	50°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	7200lm, 12000lm, 18000lm, 24000lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




50°



IP 65



Class II



50.000 Hr



BLACK



GREY

BELLATRIX




BELLATRIX



BELLATRIX + PC shallow shade




BELLATRIX + PC deep shade




Power	b	d
80W/120W	167	280
150W/180W	171	318
200W/240W	179	365

BELLATRIX



Power	a	b	d
80W/120W	78	245	380
150W/180W	80	251	416
200W/240W	85	264	471

BELLATRIX + PC shallow shade



Power	a	b	d
80W/120W	160	327	447
150W/180W	170	341	483
200W/240W	180	359	546

BELLATRIX + PC deep shade

PRODUCT SPECIFICATION

SKU	280-03714, 280-03715, 280-03716, 280-03717, 280-03718, 280-03719
Name	BELLATRIX 280 A-B / 320 A-B / 365 A-B
Material	Aluminum
Light Source	LED, SMD
Wattage	80W, 120W, 150W, 180W, 200W, 240W
Beam Angle	60° / 90° / 120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	150lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	12000lm, 18000lm, 22500lm, 27000lm, 30000lm, 36000lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




60° / 90° / 120°



IP 66



Class II



50.000 Hr



BLACK



GREY




CALYTRIX



CALYTRIX + PC shallow shade




CALYTRIX + PC deep shade




Power	b	d
100W	149	285
150W	152	323
200W	155	376

CALYTRIX



Power	a	b	d
100W	78	216	385
150W	80	220	430
200W	85	230	490

CALYTRIX + PC shallow shade



Power	a	b	d
100W	160	298	455
150W	170	310	492
200W	180	325	558


CALYTRIX + PC deep shade

PRODUCT SPECIFICATION

SKU	280-03720, 280-03721, 280-03722
Name	CALYTRIX 285 / 320 / 380
Material	Aluminum
Light Source	LED, SMD
Wattage	100W, 150W, 200W
Beam Angle	60° / 90° / 120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	12000lm, 18000lm, 24000lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




60° / 90° / 120°



IP 66



Class II





50.000 Hr



BLACK



GREY




PRODUCT SPECIFICATION


SKU	280-03732
Name	AZHA
Material	Aluminum, Stainless steel
Light Source	LED, Power LED
Wattage	9W
Beam Angle	40°
Tilt	N/A
Lumens	810lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




40°



IP 65



Class II




50,000 Hr

STAINLESS
STEEL




VEGA S black

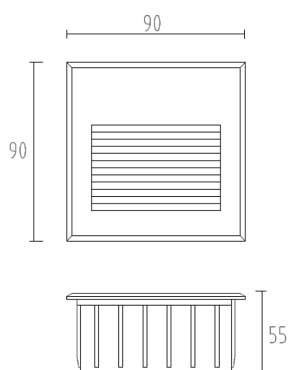

VEGA S



VEGA L black

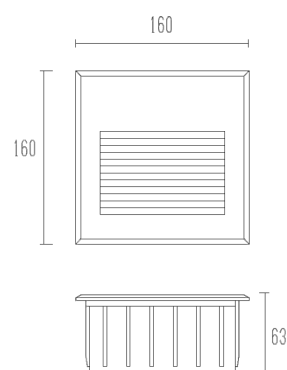

VEGA L

PRODUCT SPECIFICATION

SKU	280-03733, 280-03734
Name	VEGA S / L
Material	Aluminum
Light Source	LED, SMD
Wattage	2W, 7W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	220lm, 770lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50,000 Hr




WHITE




BLACK




GREY




VESPER HS




VESPER HL



VESPER VS



VESPER VL




VESPER V1

PRODUCT SPECIFICATION

SKU	280-03735, 280-03736, 280-03737, 280-03738, 280-03739
Name	VESPER HS / HL / VS / VL / V1
Material	Aluminum
Light Source	LED, SMD
Wattage	2W, 4W, 2W, 2W, 10W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220lm, 440lm, 220lm, 220lm, 1100lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr




WHITE




BLACK



GREY

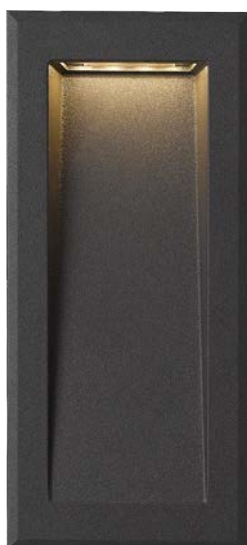


STELLAN V1 black

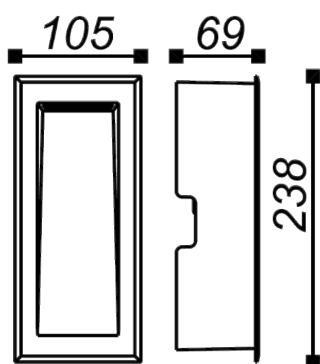

STELLAN V1



STELLAN V2 black

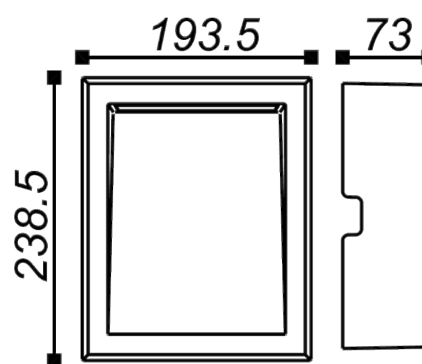

STELLAN V2

PRODUCT SPECIFICATION

SKU	280-03740, 280-03741
Name	STELLAN V1 / V2
Material	Aluminum
Light Source	LED, SMD
Wattage	3W, 6W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	100lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	300lm, 600lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50,000 Hr



WHITE



BLACK




GREY

SEREN




SEREN V1 grey

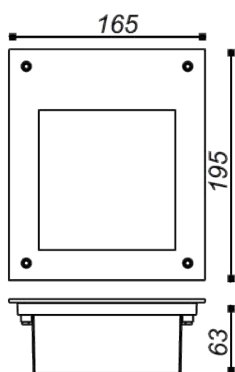

SEREN V1



SEREN V2 grey

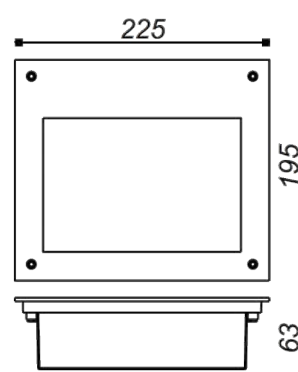

SEREN V2 grey

PRODUCT SPECIFICATION

SKU	280-03742, 280-03743
Name	SEREN V1 / V2
Material	Aluminum
Light Source	LED, SMD
Wattage	3W, 5W
Beam Angle	60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	270lm, 450lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50,000 Hr





WHITE





BLACK



GREY

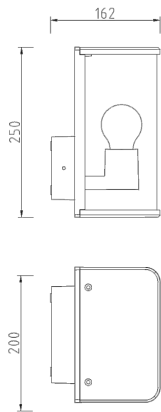

ROXY S

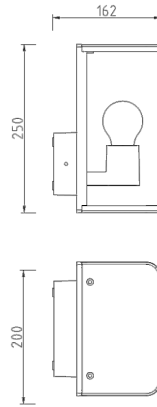

ROXY D

PRODUCT SPECIFICATION

SKU	280-03764, 280-03765
Name	ROXY S / D
Material	Aluminum, Glass
Light Source	E27 bulb
Lamp Holder	1xE27 / 2xE27
Max. Wattage	1x40W / 2x40W
Beam Angle	N/A
Tilt	N/A
Voltage	220 - 240V-AC / 50 - 60Hz
Control	N/A
IP	IP43
IK	N/A
Class	Class II
Operating Temp.	-25° - +55°C



E27



Class II



IP 43



WHITE



BLACK




GREY

ROXY



ROXY W black

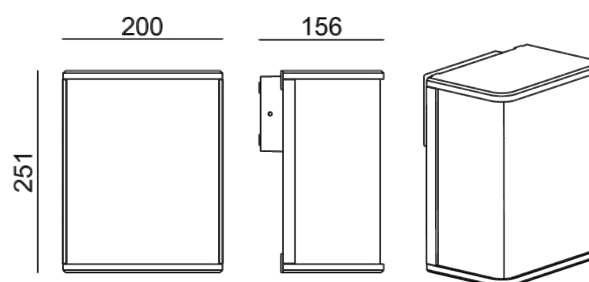


PRODUCT SPECIFICATION


SKU	280-03854
Name	ROXY W
Material	Aluminum
Light Source	LED, SMD
Wattage	12.5W
Beam Angle	120°
Tilt	N/A
Lumens	1080lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



WHITE



BLACK




GREY

ARAWAN



ARAWAN W black

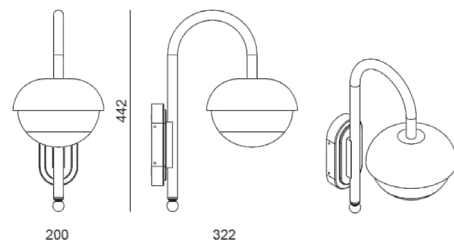

ARAWAN W

PRODUCT SPECIFICATION

SKU	280-03766
Name	ARAWAN W
Material	Aluminum, Polycarbonate
Light Source	E27 bulb
Lamp Holder	1xE27
Max. Wattage	40W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP54
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



E27



Class II



IP 54



WHITE



BLACK




GREY

REALTIN



REALTIN



REALTIN

PRODUCT SPECIFICATION

SKU	280-03767
Name	REALTIN
Material	Aluminum, Polycarbonate
Light Source	GU10 bulb
Lamp Holder	1xGU10
Max. Wattage	35W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP54
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



GU10



Class II



IP 54



WHITE



BLACK




GREY




GUNAY S grey



GUNAY L grey

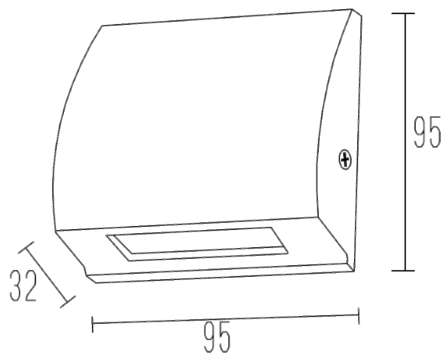

GUNAY S

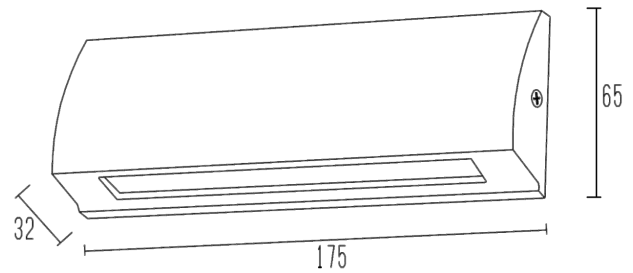

GUNAY L

PRODUCT SPECIFICATION

SKU	280-03827, 280-03828
Name	GUNAY S / L
Material	Aluminum, Glass
Light Source	LED, SMD
Wattage	3W, 6W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	330lm, 660lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



WHITE



BLACK



GREY


MEHR




MEHR L black



MEHR H black

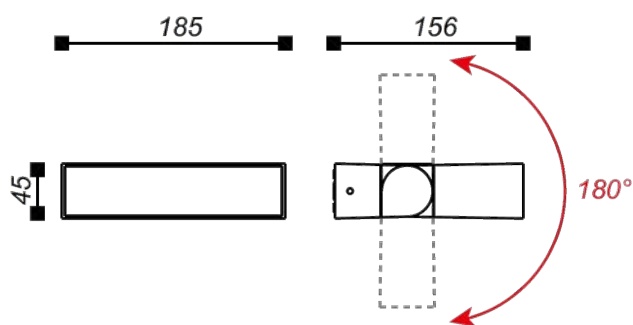

MEHR L

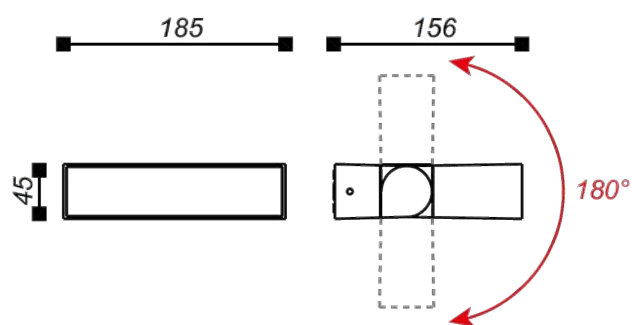

MEHR H

PRODUCT SPECIFICATION

SKU	280-03830, 280-03831
Name	MEHR L / H
Material	Aluminum, Glass
Light Source	LED, SMD (L) / Power LED (H)
Wattage	10W, 5x2W
Beam Angle	90° (L) / 30° (H)
Tilt	0°-180°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	85lm/W (L), 95lm/W (H)
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	850lm, 950lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD / Power LED




90° / 30°



IP 54



Class II



50,000 Hr



WHITE



BLACK




GREY




UMBRIEL W black



UMBRIEL S black

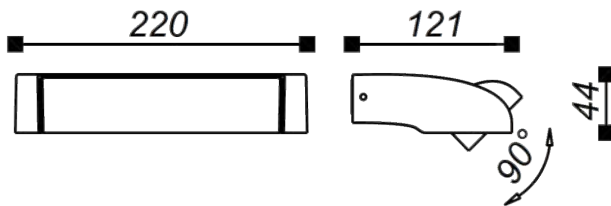

UMBRIEL W

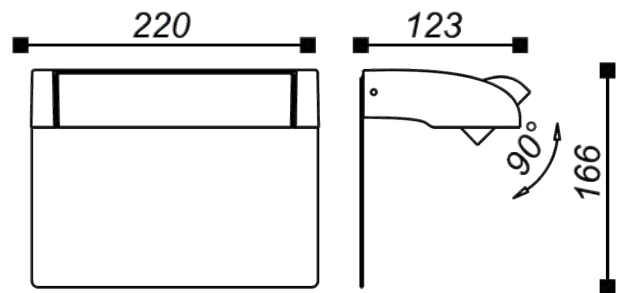

UMBRIEL S

PRODUCT SPECIFICATION

SKU	280-03833, 280-03834
Name	UMBRIEL W / S
Material	Aluminum, Glass
Light Source	LED, SMD
Wattage	6W
Beam Angle	100°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	540lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




100°



IP 54



Class II



50.000 Hr



WHITE



BLACK



GREY


YVAINE




YVAINE W black



YVAINE W-SL black

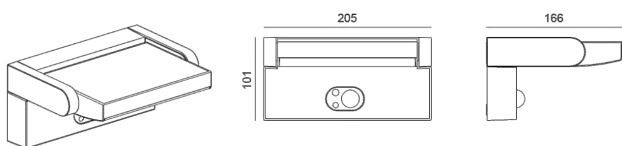

YVAINE W

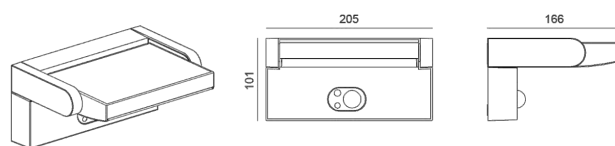

YVAINE W-SL

PRODUCT SPECIFICATION

SKU	280-03860, 280-03861
Name	YVAINE W / W-SL
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	12.5W / 3.5W
Beam Angle	120°
Tilt	0°-340°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1370lm, 380lm
Control	ON/OFF, SENSOR + PV PANEL & BATTERY (ON/OFF)
IP	IP54
IK	N/A
Class	Class I / Class III
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class I / Class III



50.000 Hr



WHITE



BLACK




GREY

ASTROPHEL




ASTROPHEL black

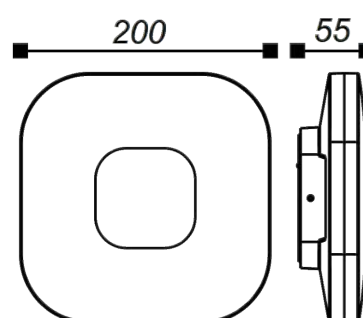


PRODUCT SPECIFICATION

SKU	280-03829
Name	ASTROPHEL
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	11W
Beam Angle	120°
Tilt	N/A
Lumens	990lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



WHITE



BLACK




GREY

ALSEPHINA




ALSEPHINA A black

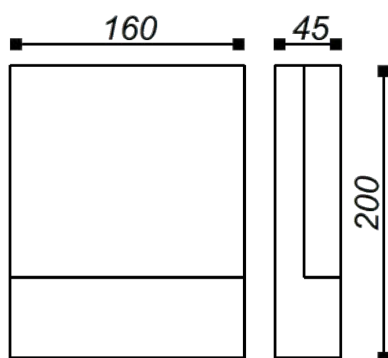

ALSEPHINA A



ALSEPHINA AS grey

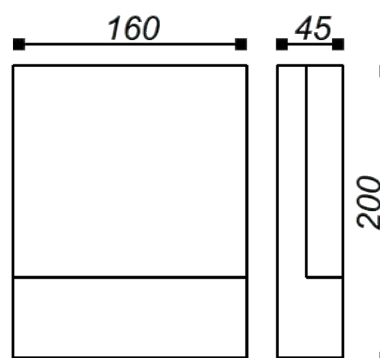

ALSEPHINA AS

PRODUCT SPECIFICATION

SKU	280-03835, 280-03836
Name	ALSEPHINA A / AS
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	6W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	630lm
Control	ON/OFF, SENSOR (ON/OFF)
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50,000 Hr



WHITE




BLACK



GREY



HESPEROS black



PRODUCT SPECIFICATION

SKU	280-03832
Name	HESPEROS
Material	Aluminum
Light Source	LED, COB
Wattage	7W
Beam Angle	120°
Tilt	N/A
Lumens	630lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C




COB



120°



IP 54



Class II



50.000 Hr



WHITE




BLACK




GREY

ROXANNE

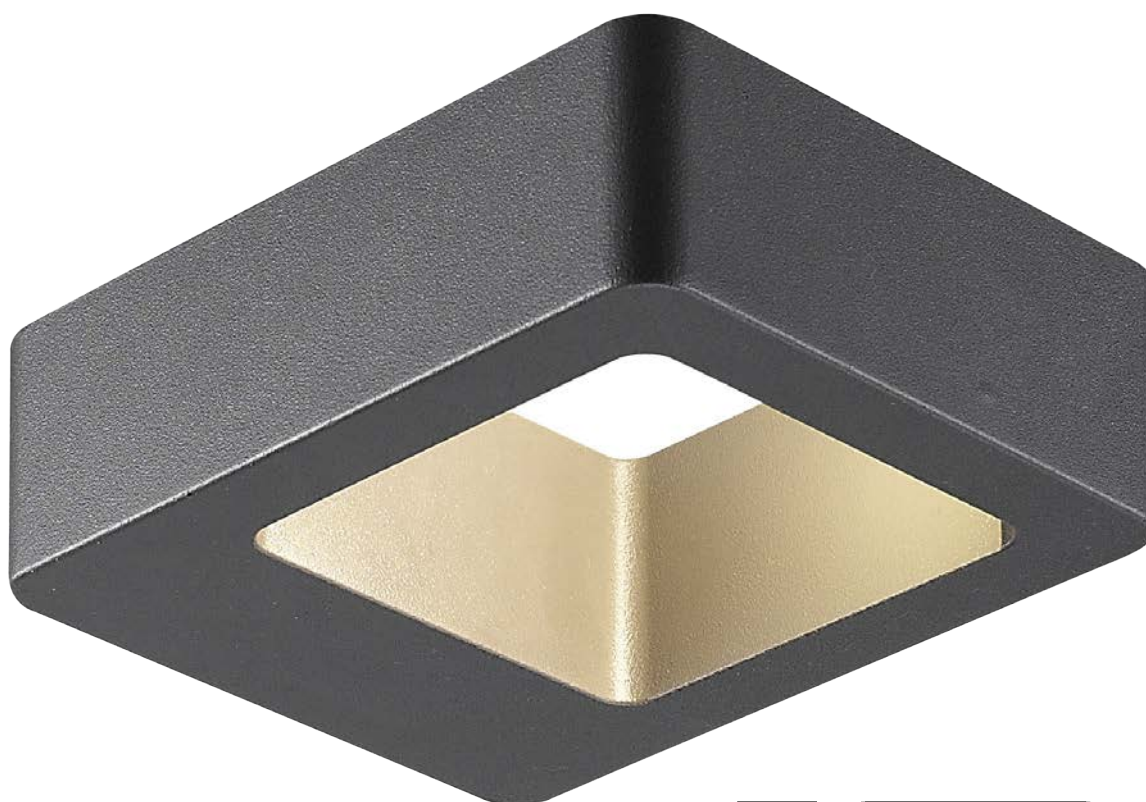


ROXANNE W black

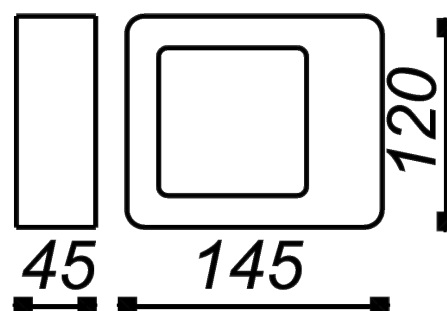


PRODUCT SPECIFICATION

SKU	280-03848
Name	ROXANNE W
Material	Aluminum
Light Source	LED, COB
Wattage	7W
Beam Angle	120°
Tilt	N/A
Lumens	630lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




120°



IP 54



Class II



50,000 Hr




WHITE




BLACK



GREY

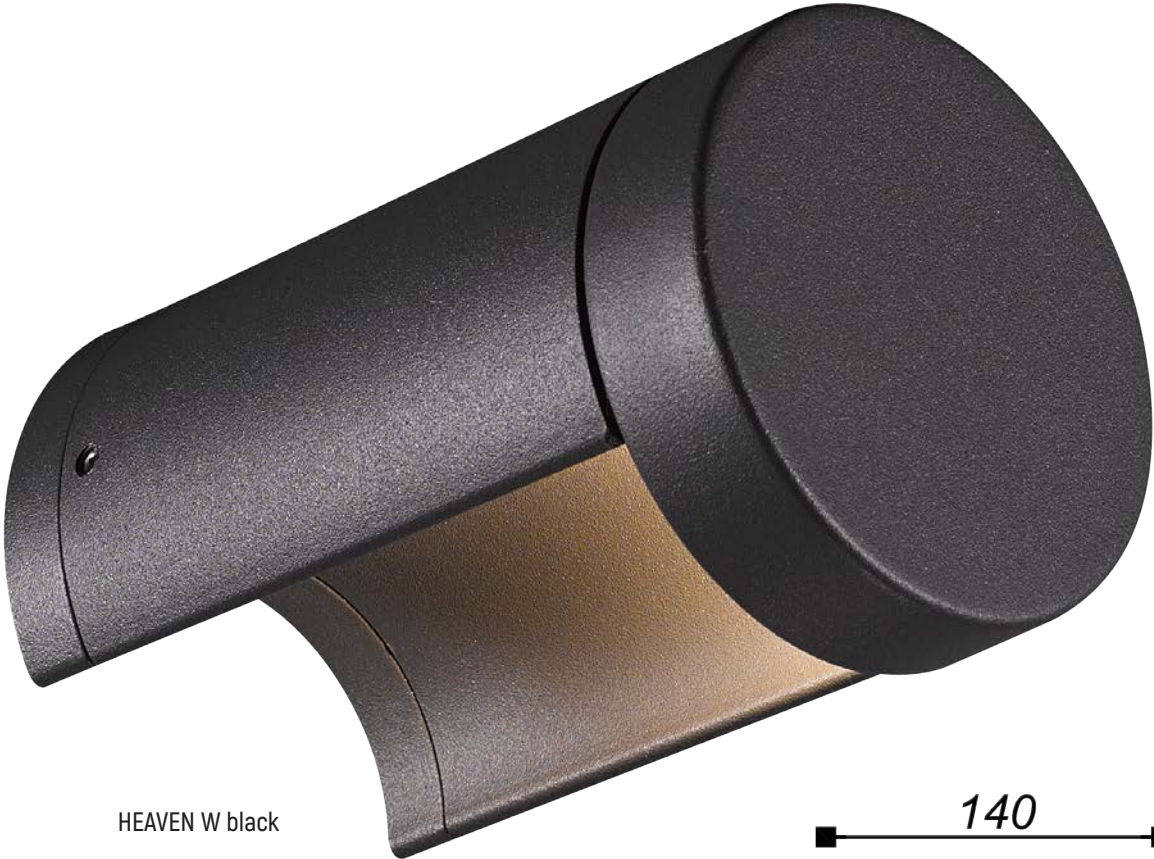

HEAVEN W black

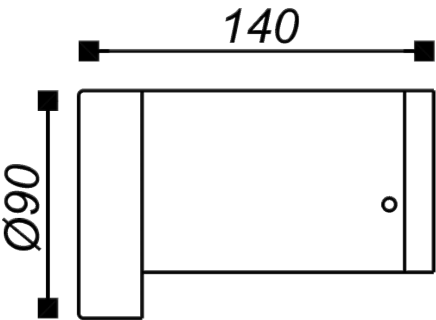

PRODUCT SPECIFICATION

SKU	280-03849
Name	HEAVEN W
Material	Aluminum
Light Source	LED, COB
Wattage	7W
Beam Angle	120°
Tilt	N/A
Lumens	630lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB



120°



IP 54



Class II



50.000 Hr



WHITE



BLACK




GREY

VELA




VELA R black

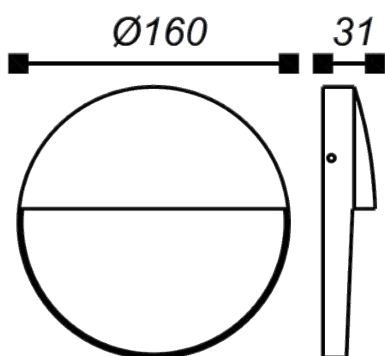

VELA R



VELA S black

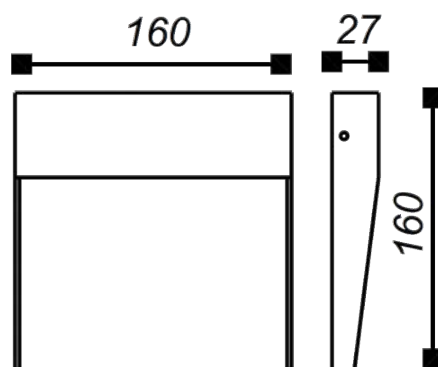


VELA S

PRODUCT SPECIFICATION

SKU	280-03852, c
Name	VELA R / S
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	3W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	100lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	300lm
Control	ON/OFF, SENSOR (ON/OFF)
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



WHITE




BLACK



GREY



ZANIAH W-SL black

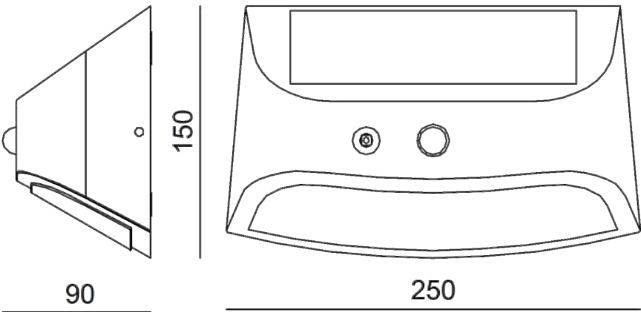

PRODUCT SPECIFICATION

SKU	280-03862
Name	ZANIAH W-SL
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	1.7W
Beam Angle	120°
Tilt	N/A
Lumens	150lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, SENSOR + PC PANEL & BATTERY (ON/OFF)
IP	IP54
IK	N/A
Class	Class III
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54



Class II



50.000 Hr



WHITE



BLACK




GREY

ZVEZDA



ZVEZDA W black

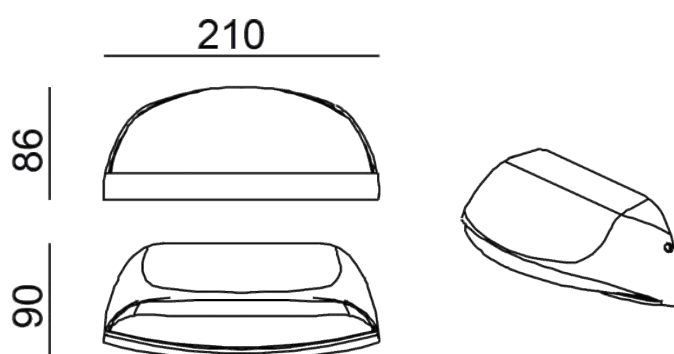


PRODUCT SPECIFICATION


SKU	280-03863
Name	ZVEZDA W
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	12W
Beam Angle	120°
Tilt	N/A
Lumens	1080lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



WHITE



BLACK




GREY

CASSIOPEIA



CASSIOPEIA W black

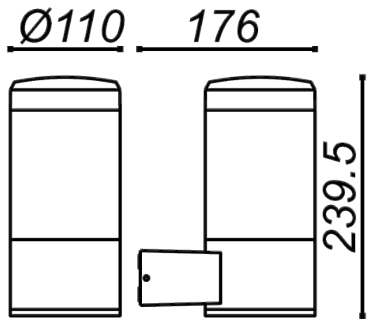

PRODUCT SPECIFICATION

SKU	280-03847
Name	CASSIOPEIA W
Material	Aluminum
Light Source	LED, SMD
Wattage	9W
Beam Angle	180°
Tilt	N/A
Lumens	720lm
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54



Class II



50.000 Hr



WHITE




BLACK



GREY

SVETLANA



PRODUCT SPECIFICATION

SKU	280-03850
Name	SVETLANA W
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	9W
Beam Angle	120°
Tilt	N/A
Lumens	1080lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr




WHITE




BLACK



GREY



TARABAI S




TARABAI SS



TARABAI D



TARABAI DS



TARABAI TS

PRODUCT SPECIFICATION

SKU	280-03855, 280-03856, 280-03857, 280-03858, 280-03859
Name	TARABAI S / SS / D / DS / TS
Material	Aluminum
Light Source	LED, SMD
Wattage	12.5W, 12.5W, 12.5W, 12.5W, 12.5W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1120lm, 1120lm, 1120lm, 1120lm, 1120lm
Control	ON/OFF / SENSOR (ON/OFF)
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



WHITE



BLACK




GREY

LINTANG




LINTANG AS grey

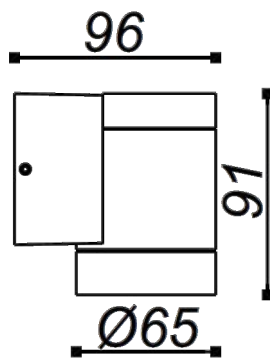

LINTANG AS



LINTANG AD grey

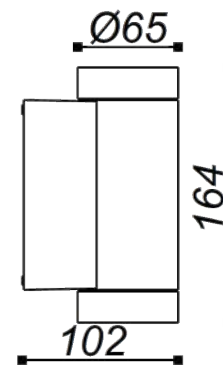

LINTANG AD

PRODUCT SPECIFICATION

SKU	280-03837, 280-03839
Name	LINTANG AS / AD
Material	Aluminum, Glass
Light Source	LED, Power LED
Wattage	3W, 2x3W
Beam Angle	25°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	270lm, 2x270lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




25°



IP 54



Class II



50,000 Hr



WHITE




BLACK



GREY




LINTANG BS grey

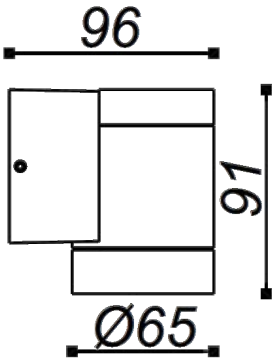

LINTANG BS



LINTANG BD grey

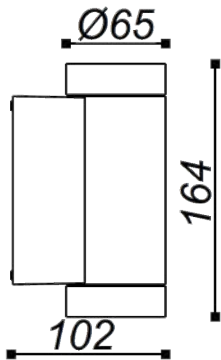

LINTANG BD

PRODUCT SPECIFICATION

SKU	280-03838, 280-03840
Name	LINTANG BS / BD
Material	Aluminum, Glass
Light Source	LED, COB
Wattage	3W, 2x3W
Beam Angle	60°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	240lm, 2x240lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB



60°



IP 54



Class II



50,000 Hr



WHITE



BLACK




GREY

HELENE




HELENE WS black

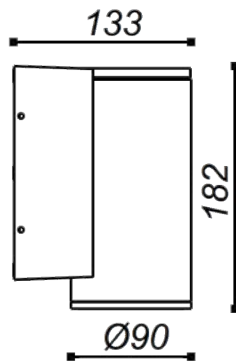

HELENE WS



HELENE WD black

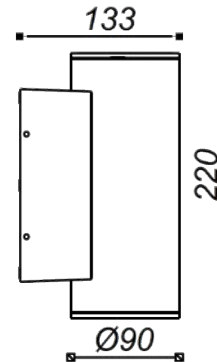

HELENE WD

PRODUCT SPECIFICATION

SKU	280-03841, 280-03842
Name	HELENE WS / WD
Material	Aluminum, Glass
Light Source	LED, COB
Wattage	12W, 2x12W
Beam Angle	45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	960lm, 2x960lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




45°



IP 54



Class II



50,000 Hr



WHITE




BLACK



GREY




HESPER WS black

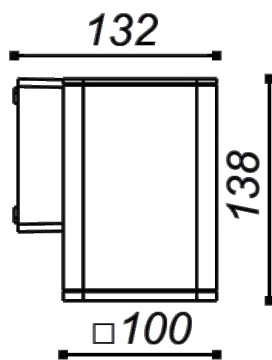

HESPER WS



HESPER WD black

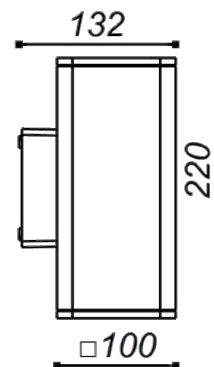

HESPER WD

PRODUCT SPECIFICATION

SKU	280-03843, 280-03844
Name	HESPER WS / WD
Material	Aluminum, Glass
Light Source	LED, COB
Wattage	12W, 2x12W
Beam Angle	45°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	960lm, 2x960lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




45°



IP 54



Class II



50,000 Hr



WHITE



BLACK




GREY

TALITHA



TALITHA W black

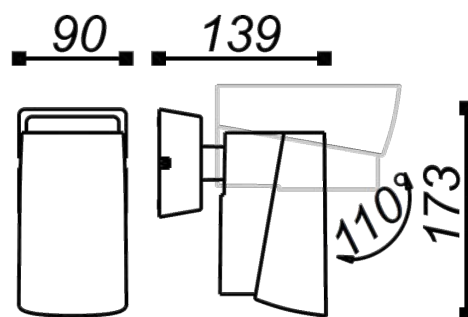


PRODUCT SPECIFICATION


SKU	280-03851
Name	TALITHA W
Material	Aluminum
Light Source	LED, COB
Wattage	12W
Beam Angle	15° / 40°
Tilt	0°-110°
Lumens	1080lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




15° / 40°



IP 65



Class II



50.000 Hr



WHITE



BLACK




GREY




SIDRA A black



SIDRA B black

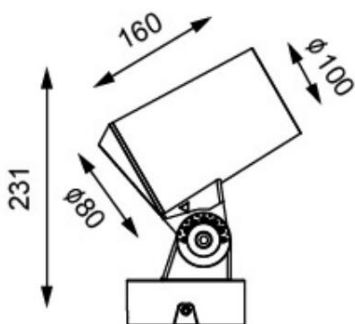

SIDRA A

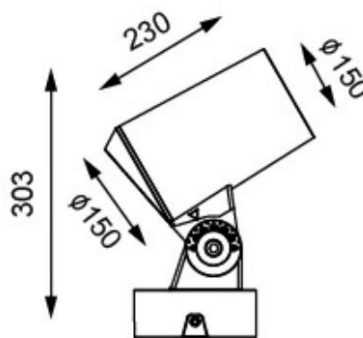

SIDRA B

PRODUCT SPECIFICATION

SKU	280-03821, 280-03822
Name	SIDRA A / B
Material	Aluminum, Glass
Light Source	LED, Power LED
Wattage	18W, 36W
Beam Angle	10° / 15° / 30° / 45° / 60°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1890lm, 3780lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




10° / 15° / 30° / 45° / 60°



IP 65



Class II



50.000 Hr



WHITE



BLACK




GREY

SUNAN




SUNAN A black

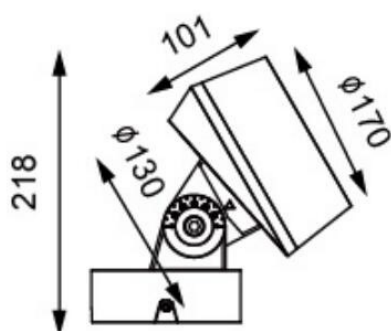

SUNAN A



SUNAN B black

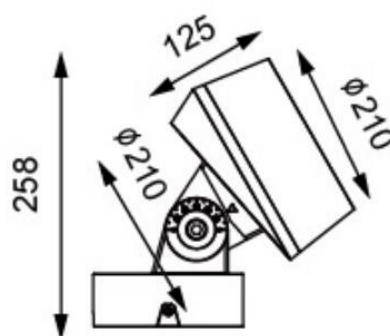


SUNAN B

PRODUCT SPECIFICATION

SKU	280-03823, 280-03824
Name	SUNAN A / B
Material	Aluminum, Glass
Light Source	LED, Power LED
Wattage	24W, 48W
Beam Angle	10° / 15° / 30° / 45° / 60°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	2520lm, 5040lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




10° / 15° / 30° / 45° / 60°



IP 65



Class II



50,000 Hr



WHITE




BLACK



GREY




SHAULA A black



SHAULA A



SHAULA B black



SHAULA B

PRODUCT SPECIFICATION

SKU	280-03825, 280-03826
Name	SHAULA A / B
Material	Aluminum, Glass
Light Source	LED, Power LED
Wattage	24W, 48W
Beam Angle	10° / 15° / 30° / 45° / 60°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	2520lm, 5040lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




10° / 15° / 30° / 45° / 60°



IP 65



Class II



50,000 Hr



WHITE



BLACK



GREY

ANDROMEDA




ANDROMEDA B grey




ANDROMEDA D grey




Back View

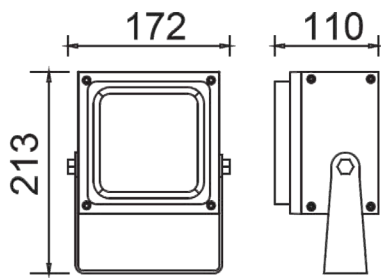


ANDROMEDA A

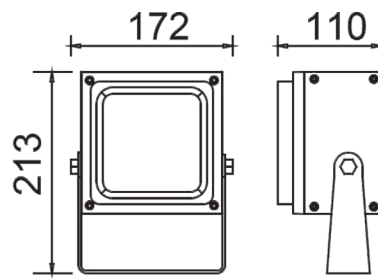

ANDROMEDA B

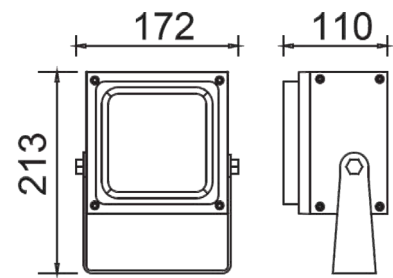

ANDROMEDA C



ANDROMEDA D

PRODUCT SPECIFICATION

SKU	280-03870, 280-03871, 280-03872, 280-03873
Name	ANDROMEDA A / B / C / D
Material	Aluminum
Light Source	LED, Power LED
Wattage	18W, 24W, 30W, 50W
Beam Angle	6° / 10° / 15° / 30° / 60°
Tilt	0°-180°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	1620lm, 2160lm, 2700lm, 4500lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




6° / 10° / 15° / 30° / 60°



IP 66



Class II



50.000 Hr



WHITE



BLACK



GREY




SERPENS A / B grey




SERPENS A / B Front View




SERPENS A / B Back View




SERPENS A



SERPENS B



SERPENS C




SERPENS D

PRODUCT SPECIFICATION

SKU	280-03874, 280-03875, 280-03876, 280-03877
Name	SERPENS A / B / C / D
Material	Aluminum
Light Source	LED, SMD
Wattage	60W, 90W, 150W, 180W
Beam Angle	30° / 60° / 90°
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	7200lm, 10800lm, 18000lm, 21600lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




30° / 60° / 90°



IP 66



Class II



50.000 Hr



WHITE



BLACK



GREY

PERSEUS




PERSEUS A



PERSEUS B



PERSEUS C




PERSEUS D

PRODUCT SPECIFICATION

SKU	224-03281, 224-032831, 224-038233, 224-032835
Name	PERSEUS A / B / C / D
Material	Aluminum
Light Source	LED, SMD
Wattage	50W, 100W, 150W, 200W
Beam Angle	60°
Tilt	0°-180°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	5500lm, 11000lm, 16500lm, 22000lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




60°



IP 65



Class II



50.000 Hr



BLACK



ZENITH 1



ZENITH 2




ZENITH 1S



ZENITH 2S

PRODUCT SPECIFICATION

SKU	280-03808, 280-03809, 280-03810, 280-03811
Name	ZENITH 1 / 1S / 2 / 2S
Material	Aluminum
Light Source	LED, SMD
Wattage	10W, 10W, 2x10W, 2x10W
Beam Angle	120°
Tilt	0°-90°/180°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	95lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	950lm, 950lm, 2x950lm, 2x950lm
Control	ON/OFF / SENSOR (ON/OFF)
IP	IP54
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



BLACK

YANG



YANG 1

W: 85 mm / L: 100 mm / H: 200 mm (YANG 1)



YANG 2


W: 252.5 mm / L: 91 mm / H: 136.5 mm (YANG 2)

PRODUCT SPECIFICATION

SKU	280-03812, 280-03813
Name	YANG 1 / 2
Material	Aluminum
Light Source	LED, SMD
Wattage	10W, 2x10W
Beam Angle	120°
Tilt	0°-90°/180°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	85lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	850lm, 2x850lm
Control	SENSOR (ON-OFF)
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50,000 Hr



BLACK

NYOTA



NYOTA S / SS

182 mm x 143 mm x 263 mm (NYOTA S / SS)



NYOTA L / LS

213.5 mm x 111 mm x 265.5 mm (NYOTA L / LS)

PRODUCT SPECIFICATION

SKU	280-03817, 280-03818, 280-03819, 280-03820
Name	NYOTA S / SS / L / LS
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	12W, 12W, 30W, 30W
Beam Angle	120°
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	105lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Lumens	1260lm, 1260lm, 3150lm, 3150lm
Control	ON/OFF / SENSOR (ON/OFF)
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54



Class II



50.000 Hr



BLACK

HYDRUS



HYDRUS R

Ø180 x 77 mm (HYDRUS R)



HYDRUS O


196.5 mm x 116.5 mm x 135 mm (HYDRUS O)

PRODUCT SPECIFICATION

SKU	280-03814, 280-03815
Name	HYDRUS R / O
Material	ABS, Polycarbonate
Light Source	LED, SMD
Wattage	8W, 8W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	115lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	920lm, 920lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II




50.000 Hr




WHITE



BLACK

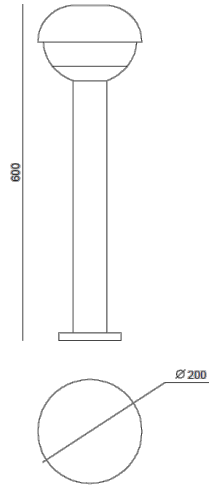

ARAWAN F

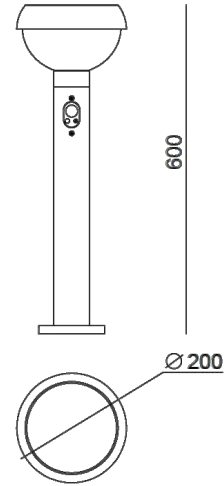

ARAWAN FS

PRODUCT SPECIFICATION

SKU	280-03905, 280-03906
Name	ARAWAN F / FS
Material	Aluminum, Polycarbonate
Light Source	E27 bulb
Lamp Holder	1xE27 / 1xE27
Max. Wattage	1x40W / 1x40W
Beam Angle	N/A
Tilt	N/A
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	N/A
IP	IP54
IK	N/A
Class	Class II
Operating Temp.	-25° ~ +55°C



E27



Class II




IP 54



DRACO



DRACO A black

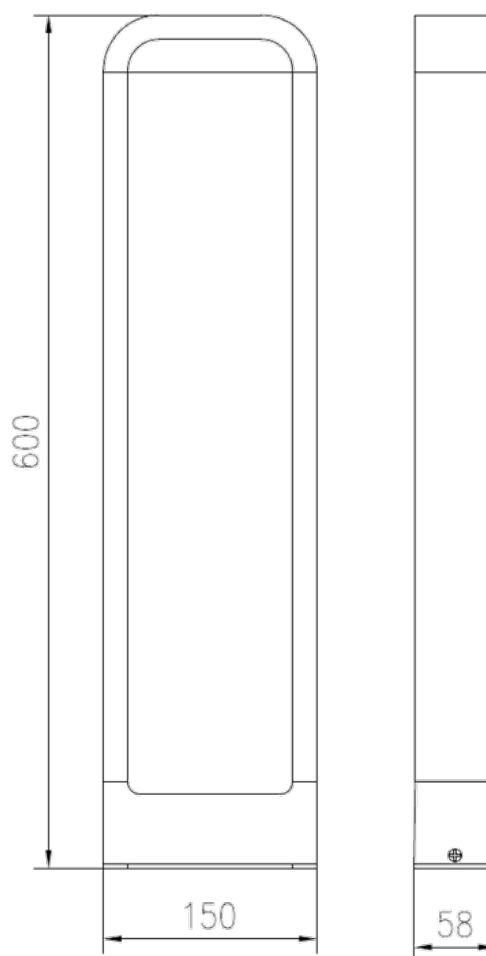


PRODUCT SPECIFICATION


SKU	280-03926
Name	DRACO A
Material	Aluminum, Glass
Light Source	LED, COB
Wattage	10W
Beam Angle	120°
Tilt	N/A
Lumens	900lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




120°



IP 65



Class II



50.000 Hr




BLACK



GREY



DRACO B black

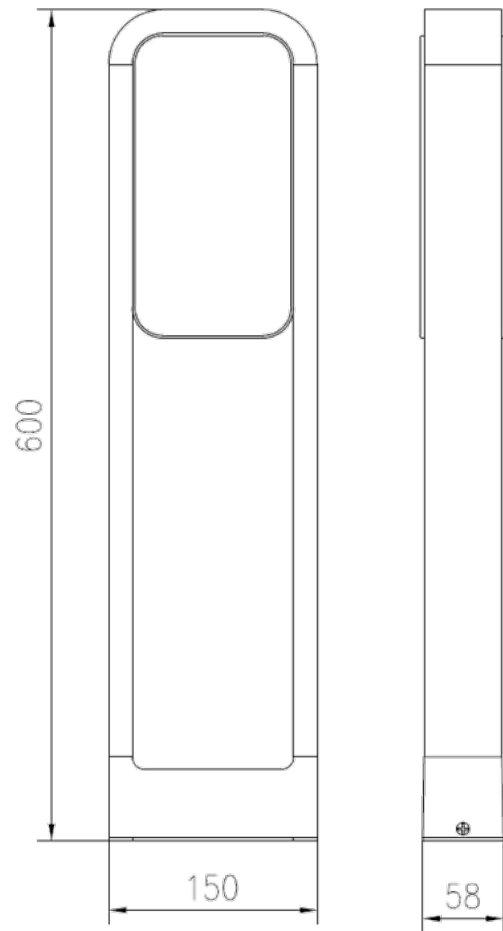

OUTDOOR

PRODUCT SPECIFICATION

SKU	280-03927
Name	DRACO B
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	2x7W
Beam Angle	120°
Tilt	N/A
Lumens	2x770lm
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 65



Class II



50.000 Hr



BLACK




GREY

PEGASUS



PEGASUS A black

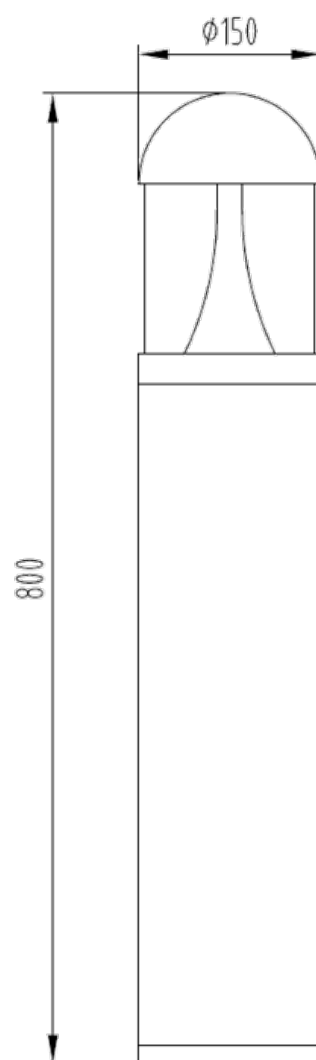


PRODUCT SPECIFICATION

SKU	280-03928
Name	PEGASUS A
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	12W
Beam Angle	120°
Tilt	N/A
Lumens	1320lm
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr




BLACK



GREY



PEGASUS B black

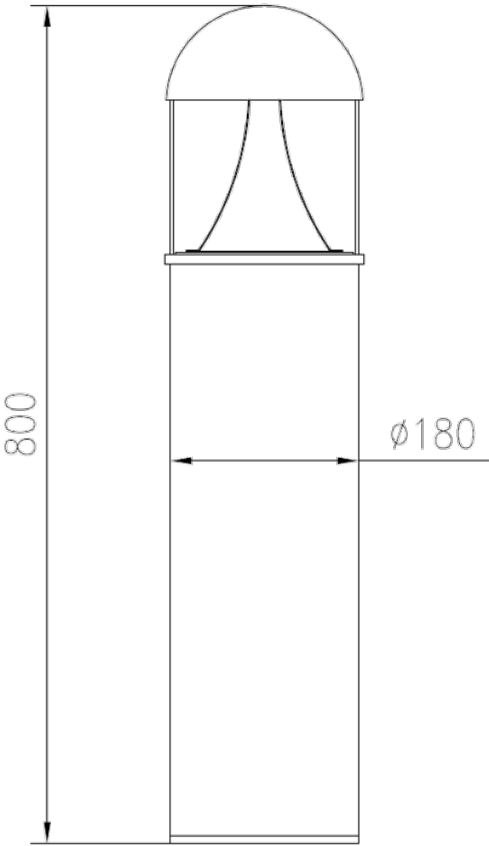

PRODUCT SPECIFICATION

SKU	280-03929
Name	PEGASUS B
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	18W
Beam Angle	120°
Tilt	N/A
Lumens	1980lm
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54



Class II



50.000 Hr



BLACK




GREY

CASSIOPEIA




CASSIOPEIA F1 black



CASSIOPEIA F1



CASSIOPEIA F2 black




CASSIOPEIA F2

PRODUCT SPECIFICATION

SKU	280-03932, 280-03933
Name	CASSIOPEIA F1 / F2
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	9W / 9W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	720lm, 720lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class I / Class III



50.000 Hr




BLACK



GREY




HEAVEN A F1 black



HEAVEN A F1




HEAVEN A F2 black



HEAVEN A F2



HEAVEN A F3 black



HEAVEN A F3

PRODUCT SPECIFICATION

SKU	280-03934, 280-03935, 280-03936
Name	HEAVEN A F1 / F2 / F3
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 7W, 7W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	630lm, 630lm, 630lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB



120°



IP 54



Class II



50.000 Hr



BLACK




GREY

HEAVEN



HEAVEN B F1 black



HEAVEN B F1



HEAVEN B F2 black



HEAVEN B F2



HEAVEN B F3 black



HEAVEN B F3

PRODUCT SPECIFICATION

SKU	280-03937, 280-03938, 280-03939
Name	HEAVEN B F1 / F2 / F3
Material	Aluminum
Light Source	LED, COB
Wattage	12W, 12W, 12W
Beam Angle	120°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	1080lm, 1080lm, 1080lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




120°



IP 54



Class II



50.000 Hr



BLACK



GREY




DIADEM 1 black




DIADEM 2 black




DIADEM 3 black

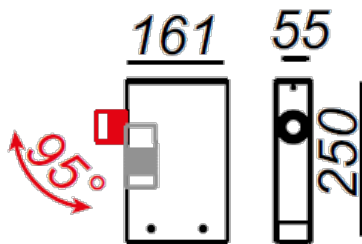

DIADEM 1



DIADEM 2



DIADEM 3

PRODUCT SPECIFICATION

SKU	280-03951, 280-03952, 280-03953
Name	DIADEM 1 / 2 / 3
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 2x7W, 3x7W
Beam Angle	30°
Tilt	0°-95°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	560lm, 2x560lm, 3x560lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




30°



IP 65



Class II



50.000 Hr



BLACK




GREY

FULU




FULU L black

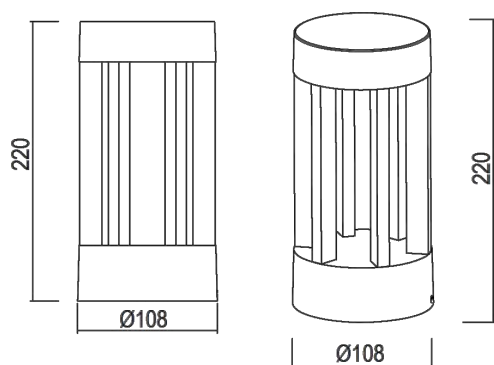

FULU L



FULU H black

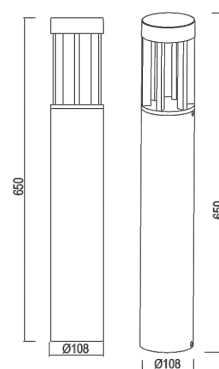


FULU H

PRODUCT SPECIFICATION

SKU	280-03954, 280-03955
Name	FULU L / H
Material	Aluminum, Glass
Light Source	LED, COB
Wattage	8W / 8W
Beam Angle	90°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50,000 Hr
Voltage	720lm, 720lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




90°



IP 54



Class II



50,000 Hr



BLACK



GREY



CHASON 1 black



CHASON 2 black



CHASON 3 black



CHASON 1



CHASON 2



CHASON 3

PRODUCT SPECIFICATION

SKU	280-03948, 280-03949, 280-03950
Name	CHASON 1 / 2 / 3
Material	Aluminum
Light Source	LED, COB
Wattage	7W, 2x7W, 3x7W
Beam Angle	40°
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	80lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	560lm, 2x560lm, 3x560lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




40°



IP 54



Class II



50.000 Hr



BLACK




GREY

SVETLANA



SVETLANA B black

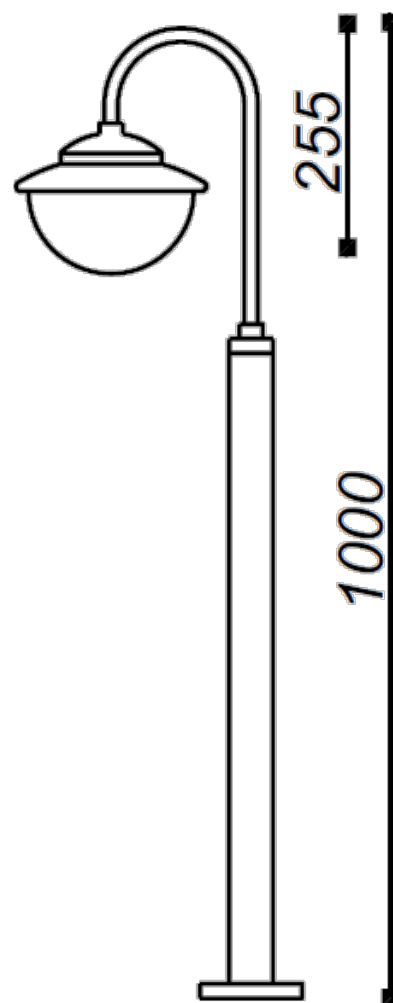


PRODUCT SPECIFICATION


SKU	280-03940
Name	SVETLANA B
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	9W
Beam Angle	120°
Tilt	N/A
Lumens	1080lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



BLACK




GREY

TALITHA



TALITHA G black

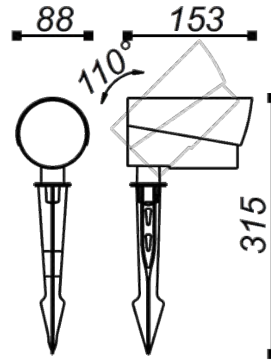

PRODUCT SPECIFICATION

SKU	280-03941
Name	TALITHA G
Material	Aluminum
Light Source	LED, COB
Wattage	12W
Beam Angle	15° / 40°
Tilt	0°-110°
Lumens	1080lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



COB




15° / 40°



IP 65



Class II



50.000 Hr



WHITE




BLACK



GREY


BUNDA

BUNDA G1 black

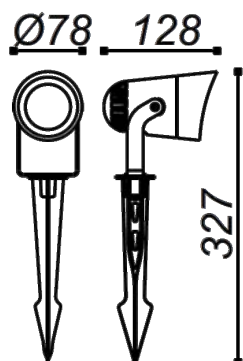

BUNDA G1

BUNDA G2 black

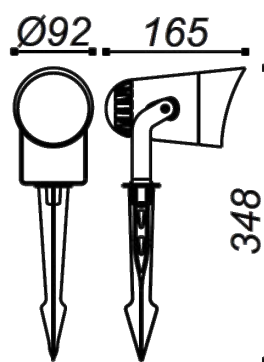

BUNDA G2

PRODUCT SPECIFICATION

SKU	280-03943, 280-03944
Name	BUNDA G1 / G2
Material	Aluminum, Glass
Light Source	LED, Power LED (G1) / SMD (G2)
Wattage	3x1W, 12W
Beam Angle	25° (G1) / 25° (G2)
Tilt	0°-90°
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	90lm/W (G1), 100lm/W (G2)
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	270lm, 1200lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



Power LED




25°



IP 65



Class II



50,000 Hr




BLACK



GREY



ALCOR G black

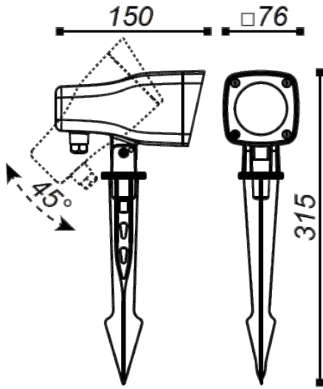

PRODUCT SPECIFICATION

SKU	280-03942
Name	ALCOR G
Material	Aluminum
Light Source	LED, COB
Wattage	7W
Beam Angle	25°
Tilt	0°-45°
Lumens	630lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>90
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C




COB



25°



IP 65



Class II



50.000 Hr



WHITE



BLACK




GREY

CORVUS




CORVUS F black




PRODUCT SPECIFICATION

SKU	280-03931
Name	CORVUS F
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	18W
Beam Angle	120°
Tilt	N/A
Lumens	1620lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




120°



IP 54



Class II



50.000 Hr



WHITE




BLACK



GREY



NAOS S grey

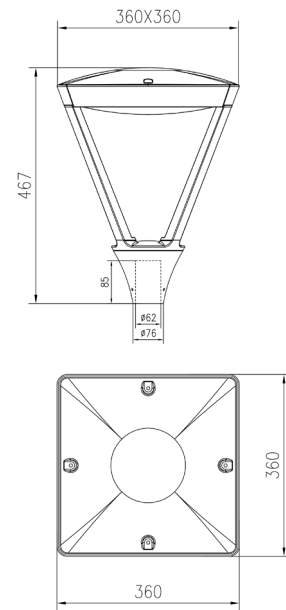

PRODUCT SPECIFICATION

SKU	280-03956, 280-03957, 280-03958
Name	NAOS S A / B / C
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	45W, 60W, 80W
Beam Angle	Symmetric wide
Tilt	N/A
Lumens	5400lm, 7200lm, 9600lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



Symmetric wide



IP 65



Class II



50.000 Hr




BLACK





GREY

NAOS

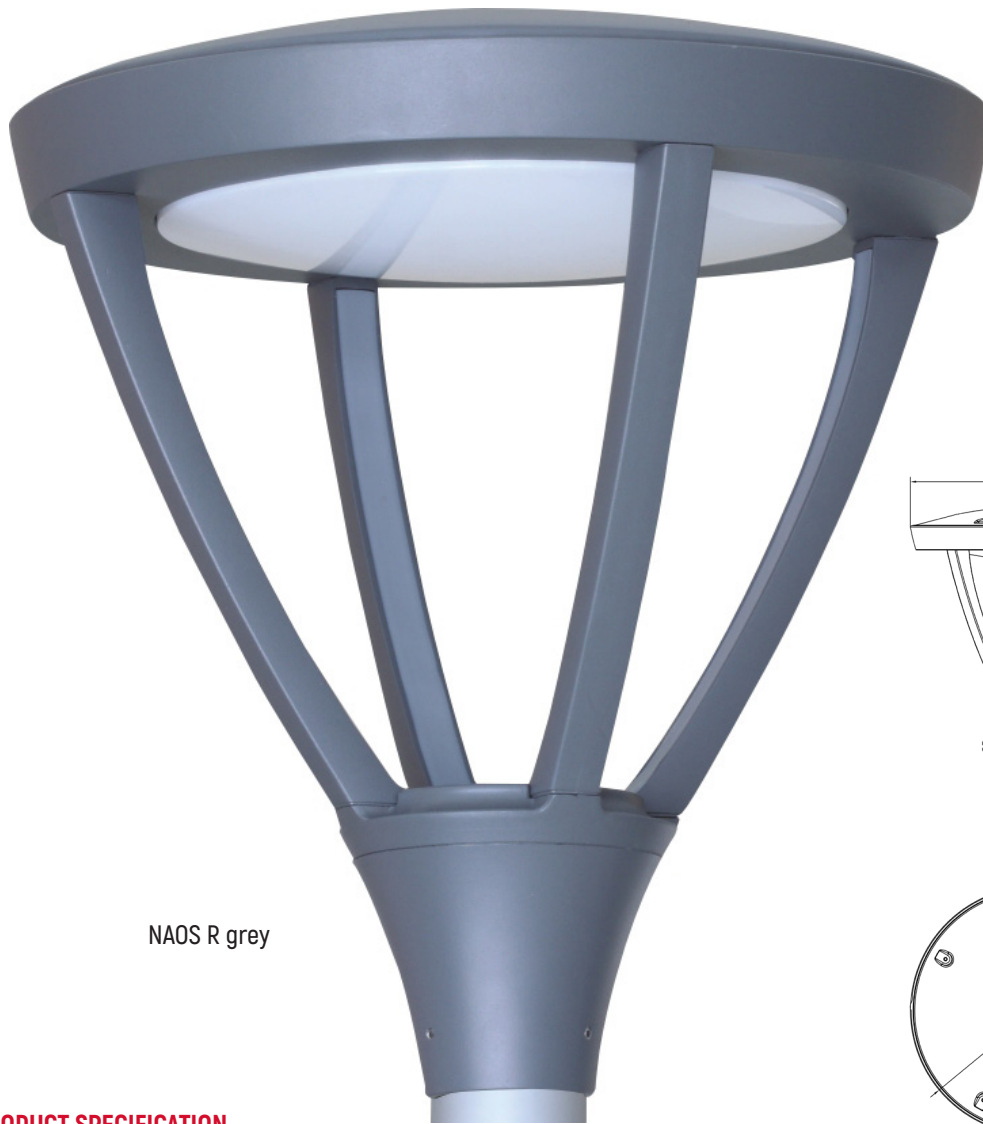

NAOS R grey



PRODUCT SPECIFICATION


SKU	280-03959, 280-03960, 280-03961
Name	NAOS R A / B / C
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	45W, 60W, 80W
Beam Angle	Symmetric wide
Tilt	N/A
Lumens	5400lm, 7200lm, 9600lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




Symmetric wide



IP 65



Class II



50.000 Hr




BLACK



GREY



URUK black

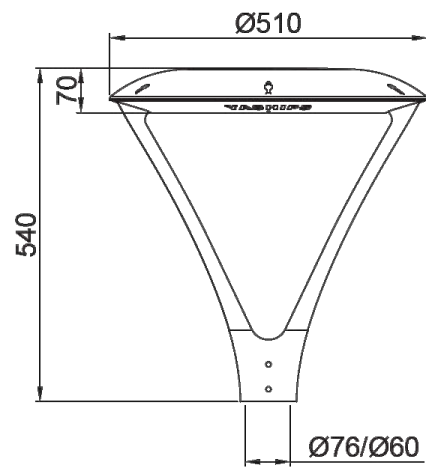

PRODUCT SPECIFICATION

SKU	280-03967, 280-03968, 280-03969, 280-03970
Name	URUK A / B / C / D
Material	Aluminum, Glass
Light Source	LED, SMD
Wattage	60W, 80W, 100W, 120W
Beam Angle	Symmetric wide
Tilt	N/A
Lumens	6600lm, 8800lm, 11000lm, 13200lm
Efficacy	110lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP66
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




Symmetric wide



IP 66



Class II



50.000 Hr



BLACK




GREY


PETRA



PETRA A grey

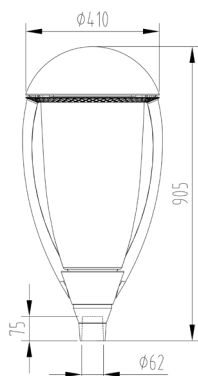

PETRA A

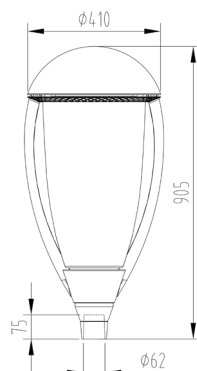

PETRA B



PETRA B grey

PRODUCT SPECIFICATION

SKU	280-03962, 280-03963
Name	PETRA A / B
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	50W, 50W
Beam Angle	Symmetric wide
Tilt	N/A
Lumens	220 ~ 240V-AC / 50 ~ 60Hz
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50,000 Hr
Voltage	6000lm, 6000lm
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP65
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD




Symmetric wide



IP 65



Class II



50,000 Hr




BLACK



GREY



SKAT grey

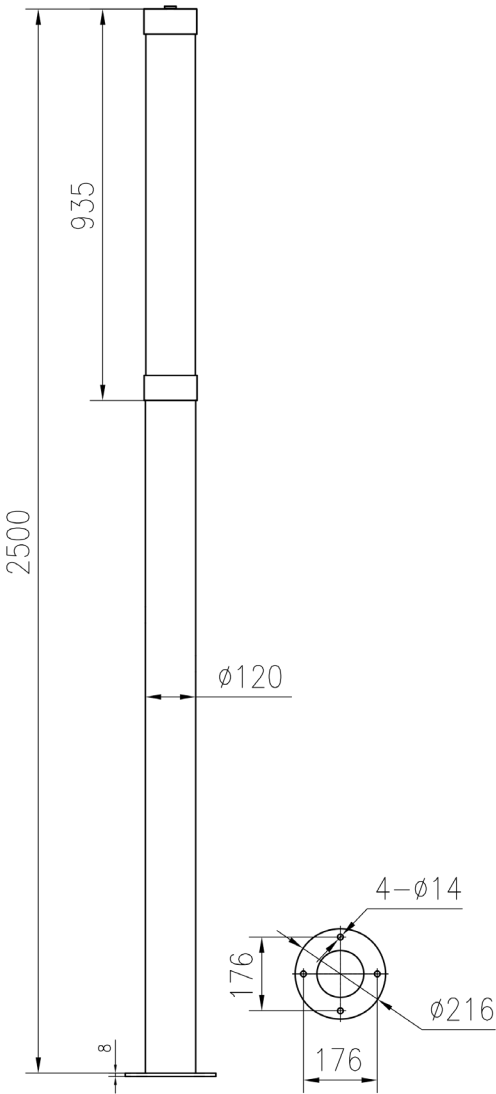

PRODUCT SPECIFICATION

SKU	280-03964
Name	SKAT
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	40W
Beam Angle	Symmetric wide
Tilt	N/A
Lumens	4800lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	IK08
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



Symmetric wide



IP 54



Class II



50.000 Hr



BLACK




GREY

SVETLANA



SVETLANA PD black

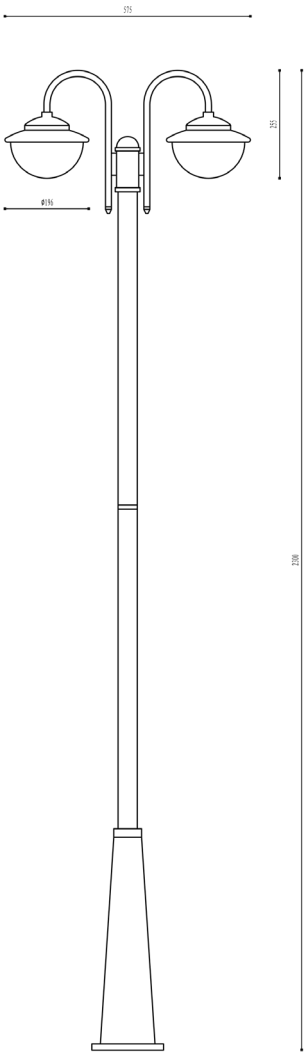

PRODUCT SPECIFICATION

SKU	280-03966
Name	SVETLANA PD
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	2x9W
Beam Angle	120°
Tilt	N/A
Lumens	2x1080lm
Efficacy	120lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54



Class II



50.000 Hr




BLACK



GREY



CORVUS PT black

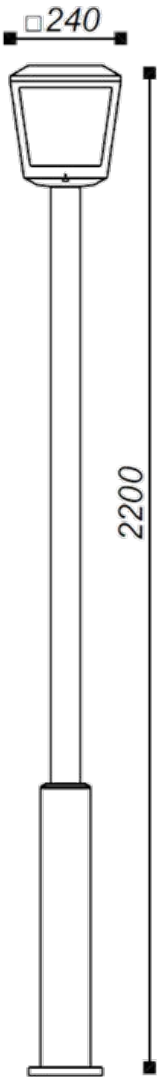

PRODUCT SPECIFICATION

SKU	280-03965
Name	CORVUS PT
Material	Aluminum, Polycarbonate
Light Source	LED, SMD
Wattage	18W
Beam Angle	120°
Tilt	N/A
Lumens	1620lm
Efficacy	90lm/W
CCT	2700K / 3000K / 4000K / 5000K / 6000K
CRI	CRI>80
Lifespan	50.000 Hr
Voltage	220 ~ 240V-AC / 50 ~ 60Hz
Control	ON/OFF, TRIAC / 0-10V / DALI DIMM
IP	IP54
IK	N/A
Class	Class II
Operation Temp.	-25° ~ +55°C



SMD



120°



IP 54



Class II



50.000 Hr



BLACK



GREY

Technical Info

SYMBOLS



Light source



Beam angle




Light color temprature



IP rating



Protection Class I -
Light fixture with earth connector or terminal



Protection Class II -
Light fixture with double insulation or reinforced insulation



Protection Class III -
Protection is assured by the presence of a safety extra low voltage (SELV) not exceeding 50V



Lifespan

IP & IK Standards

IP DEGREE OF PROTECTION AND CLASS OF INSULATION

First Digit IP - Protection Against Solid Bodies

0 - Non protected.

1 - A large surface of the body, such as a hand (but no protection against deliberate access). Solid objects exceeding 50mm in diameter.

2 - Finger or similar objects not exceeding 80 mm in length. Solid objects exceeding 12 mm in diameter.

3 - Tools, wires, etc. of diameter thickness greater than 2,5mm. Solid objects exceeding 2,5mm in diameter.

4 - Wires or strips of thickness greater than 1,0 mm. Solid objects exceeding 1,0 mm diameter.

5 - Ingress of dust is not totally prevented but dust does not enter in sufficient quantity to interfere with satisfactory operation of the equipment.

6 - No ingress of dust.

Second Digit IP - Protection Against Water

0 - Non protected.

1 - Dripping water (vertically falling drops) shall have no harmful effect.

2 - Vertically dripping water shall have no harmful effect when the enclosure is tilted at any angle up to 15° from its normal position.

3 - Water falling as a spray at an angle up to 60° from the vertical shall have no harmful effect.

4 - Water splashed against the enclosure from any direction shall have no harmful effect.

5 - Water projected by a nozzle against the enclosure from any direction shall have no harmful effect.

6 - Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.

7 - Ingress of water in a harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time.

8 - The equipment is suitable for continuous submersion in water under conditions which shall be specified by the manufacturer.

IK DEGREE OF RESISTANCE

Resistance to external mechanical impacts:

IK code refers to the maximum external impact the luminaire is capable to withstand, without irreversible damage.

In compliance with EN50102 standards.

IK code	Impact Energy (Joule)	Mass/Height
IK00	0,00	-----
IK01	0,15	0,2Kg/70mm
IK02	0,20	0,2Kg/100mm
IK03	0,35	0,2Kg/175mm
IK04	0,50	0,2Kg/250mm
IK05	0,70	0,2Kg/350mm
IK06	1,00	0,5Kg/200mm
IK07	2,00	0,5Kg/400mm
IK08	5,00	1,7Kg/295mm
IK09	10,00	5,0Kg/200mm

DISCLAIMER & WARRANTY

DISCLAIMER

- The technical information detailed in our catalogue can be modified in order to improve the features or design of our products.
- TEKLED keeps the right to cancel or modify any model without prior notice and without any cause for complaints.
- The conditions and technical characteristics of the products that appear in this catalogue are the effective ones in the date of impression of the catalogue except for typographical error and are subject to possible changes.
- Returned goods shall only be accepted, after prior notice being given to TEKLED, on the grounds of being defective and never on the basis of broken glass or missing parts. In such cases, please contact us so that we can send you the required parts as a matter of urgency.
- Exchanges or returns of goods in good condition will not be accepted. In the event of express acceptance by TEKLED, a 20% charge shall be incurred, on receipt and checking, for depreciation and classification of the goods.

WARRANTY

TEKLED warrants to the Buyer the satisfactory operation of its products for the period of three-to-five (3-5) years from date of Purchaser's purchase (the invoice date).

Within the warranty period any defects with TEKLED products as a result of faulty materials or workmanship will be rectified free of charge.

TEKLED reserves the right to rectify the fault by repair, exchange or replacement.

The warranty does not cover and the manufacturer will not be liable for:

- Parts and materials subject to continuous wear;
- Problems resulting from external causes such as accident, abuse, misuse, mishandling, negligence, fire, theft, vandalism, riot, explosion, natural disaster, or other external causes unrelated to product defect;
- Conditions demonstrating faulty installation, misapplication, extreme environmental conditions beyond those defined in the product specification, under/over voltage situations, lack of compliance with applicable instructions, improper or inadequate handling, shipping, maintenance, negligence, accident or tampering;
- Incompatibility, improper design, manufacture, installation, operation or maintenance of products not supplied by Manufacturer;
- Situations in which manufacturer's control gears fixtures and or any parts are replaced with those from other manufacturers;
- The quality of the installation on Manufacturer products by the installer of those products. For example, the above warranties would not cover problems resulting from such an installer's installation methods.
- Small defects having a negligible effect in value or operation.

The warranty does not apply to any other claims (for instance additional cost incurred by the customer) unless agreed and accepted by the manufacturer in writing.

Index

A

ALCOR 143
 ALCOR G 5-143
 ALSEPHINA A / AS 4-104
 ALULA 4-60
 ALYA 4-61
 ALZIR 10-11-12-13-14
 ALZIR A 3-10
 ALZIR R 3-11
 ALZIR RD 3-13
 ALZIR S 3-12
 ALZIR SD 3-14
 ANDROMEDA A / B / C / D 5-122
 ANTARES 15-16-17
 ANTARES F 3-16
 ANTARES F1 3-15
 ANTARES T 3-17
 AQUILA 3 / 4 / 6 / 8 4-62
 ARAWAN F / FS 5-129
 ARAWAN W 4-97
 ARCHER 18
 ARCHER 1 / 2 / 3 3-18
 ARES 3 / 4 / 5 / 6 / 8 4-63
 ASTREA S / R 4-64
 ASTRO 19
 ASTRO 50 / 60 / 75 / 90 / 120 3-19
 ASTROPHEL 103
 ATRIA 4-65
 AURIGA 220 / 265 / 330 / 390 4-87
 AZHA 4-90

B

BELLATRIX 280 A-B / 320 A-B / 365 A-B 4-88
 BUNDA 142
 BUNDA G1 / G2 5-142

C

CAELUM 20
 CAELUM 60 / 75 / 90 / 110 3-20
 CALYTRIX 285 / 320 / 380 4-89
 CANIS 21-22-23
 CANIS R 75 / 90 / 105 / 120 3-21
 CANIS S2 75 / 90 / 105 / 120 3-23
 CANIS S 75 / 90 / 105 / 120 3-22
 CARINA 118 / 218 / 136 / 236 / 158 / 258 4-66
 CASSIOPEIA 111-134

CASSIOPEIA F1 / F2 5-134
 CASSIOPEIA W 5-111
 CASTOR 75 O / R / S 3-26
 CELESTE 60 / 120 4-85
 CHASON 139
 CHASON 1 / 2 / 3 5-139
 CITLALI 6 / 12 / 18 3-31
 CITLALI GD 12 / 18 3-32
 CITLALI SD 12 / 18 3-34
 CITLALI TD 12 / 18 3-33
 CORVUS 144-151
 CORVUS F 5-144
 CORVUS PT 5-151
 CYRUS 1 / 2 / 5 / 10 / 15 3-29
 CYRUS L 1 / 2 / 3 3-28
 CYRUS T 1 / 2 / 5 / 10 / 15 3-30

D

DANICA 60 / 120 / 150 4-84
 DARA 25 / 35 / 50 3-27
 DELPHINUS SQ1 / SQ2 / RC 4-77
 DIADEM 137
 DIADEM 1 / 2 / 3 5-137
 DRACO 130-131
 DRACO A 5-130
 DRACO B 5-131

E

ELECTRA 118 / 218 / 136 / 236 / 158 / 258 4-67
 ESTELLA 3 / 4 / 6 / 8 4-68
 ETOILE 4-69

F

FELIS 75 / 95 3-24
 FINLAY 2 / 3 / 3.5 / 4 / 5 / 6 / 8 3-25
 FULU 138
 FULU L / H 5-138

G

GUNAY S / L 4-99

H

HASHI 4-73
 HEAVEN 107-135-136
 HEAVEN A F1 / F2 / F3 5-135
 HEAVEN B F1 / F2 / F3 5-136
 HEAVEN W 5-107

HELENE C 4-70
 HELENE WS / WD 5-116
 HESPER C 4-71
 HESPEROS 4-105
 HESPER WS / WD 5-117
 HINATA 4-72
 HOKU 4 / 5 / 6 3-35
 HYDRUS R / O 5-128

I

INDUS 85 / 120 / 170 / 220 / 300 3-36
 ITRI 6060 / 60120 3-37
 IZAR 250 / 300 / 350 / 450 / 600 3-38

L

LEO 200 / 250 / 300 3-40
 LINTANG AS / AD 5-114
 LINTANG BS / BD 5-115
 LYNX 450 / 600 / 900 / 1000 3-41
 LYRA A / B 4-80

M

MAIA A / B / C 4-78
 MEHR L / H 100
 MEISSA A / B / C 4-79
 MIRAM 118 / 218 / 136 / 236 / 158 / 258 4-81

N

NAJIMA 118 / 218 / 136 / 236 / 158 / 258 4-82
 NAMID 300 / 350 / 450 / 600 3-39
 NAOS 145-146
 NAOS R A / B / C 5-146
 NAOS S A / B / C 5-145
 NASHI 120 / 200 / 300 3-42
 NASHIA 60 / 120 / 150 4-83
 NAVI 120 / 200 / 300 3-43
 NOVA O1 / O2 / R 4-74
 NYOTA S / SS / L / LS 5-127

O

ORION 235 / 285 / 335 3-44

P

PAVO 3-45
 PEGASUS 132-133
 PEGASUS A 5-132
 PEGASUS B 5-133
 PERSEUS A / B / C / D 5-124
 PETRA 148

PETRA A / B 5-148
 PHOEBE 250 / 350 / 450 4-75
 PHOENIX 300 / 350 / 450 / 600 3-46
 POLLUX 3-47
 PYXIS 3-48

R

RASALAS 3-49
 RASTABAN 3-50
 REALTA 350 / 430 4-76
 REALTIN 4-98
 REGULUS 3-51
 RIGEL 3-52
 ROXANNE W 5-106
 ROXY S / D 4-95
 ROXY W 4-96

S

SABIK 3-53
 SAL 60 / 80 / 90 3-57
 SAMSON 70 / 90 3-54
 SCORPIUS 90 / 100 3-55
 SEREN V1 / V2 4-94
 SERPENS A / B / C / D 5-123
 SHAULA A / B 5-121
 SIDRA A / B 5-119
 SIRIUS 200 / 250 / 300 3-58
 SKAT 5-149
 SOLARIS 56 / 65 / 75 3-56
 STELLAN V1 / V2 4-93
 SUNAN A / B 5-120
 SVETLANA 112-140-150
 SVETLANA B 5-140
 SVETLANA PD 5-150
 SVETLANA W 5-112

T

TALITHA 118-141
 TALITHA G 5-141
 TALITHA W 5-118
 TARABAI S / SS / D / DS / TS 5-113
 TARAK 4-86

U

UMBRIEL W / S 101
 URUK 147
 URUK A / B / C / D 5-147

V

VEGA S / L 4-91

VELA R / S 5-108

VESPER HS / HL / VS / VL / V1 4-92

W

WARRANTY 154

Y

YANG 1 / 2 5-126

YVAINE W / W-SL 102

Z

ZANIAH W-SL 5-109

ZENITH 1 / 1S / 2 / 2S 5-125

ZVEZDA W 5-110

INDEX SORT BY SKU

121-03980.....	ORION 235.....	44	280-03321.....	CASTOR 75 O.....	26
121-03986.....	ORION 285.....	44	280-03322.....	CASTOR 75 R.....	26
121-03992.....	ORION 335.....	44	280-03323.....	CASTOR 75 S.....	26
143-03700.....	ANTARES F1.....	15	280-03324.....	CITLALI 6.....	31
143-03706.....	ALULA.....	60	280-03325.....	CITLALI 12.....	31
143-03712.....	ANTARES F.....	16	280-03326.....	CITLALI 18.....	31
143-03718.....	ANTARES T.....	17	280-03327.....	CITLALI GD 12.....	32
143-03730.....	ALYA.....	61	280-03328.....	CITLALI GD 18.....	32
165-03600.....	INDUS 85.....	36	280-03330.....	CITLALI TD 12.....	33
165-03604.....	INDUS 120.....	36	280-03331.....	CITLALI TD 18.....	33
165-03608.....	INDUS 170.....	36	280-03333.....	CITLALI SD 12.....	34
165-03612.....	INDUS 220.....	36	280-03334.....	CITLALI SD 18.....	34
165-036178.....	INDUS 300.....	36	280-03340.....	CYRUS 1.....	29
165-038400.....	ITRI 6060.....	37	280-03341.....	CYRUS 2.....	29
165-038404.....	ITRI 60120.....	37	280-03342.....	CYRUS 5.....	29
165-03872.....	ARCHER 1.....	18	280-03343.....	CYRUS 10.....	29
165-03874.....	ARCHER 2.....	18	280-03344.....	CYRUS 15.....	29
165-03876.....	ARCHER 3.....	18	280-03345.....	CYRUS T 1.....	30
224-03281.....	PERSEUS A.....	124	280-03346.....	CYRUS T 2.....	30
224-032831.....	PERSEUS B.....	124	280-03347.....	CYRUS T 5.....	30
224-032835.....	PERSEUS D.....	124	280-03348.....	CYRUS T 10.....	30
224-038233.....	PERSEUS C.....	124	280-03349.....	CYRUS T 15.....	30
280-03300.....	ASTRO 50.....	19	280-03351.....	CYRUS L 1.....	28
280-03301.....	ASTRO 60.....	19	280-03352.....	CYRUS L 2.....	28
280-03302.....	ASTRO 75.....	19	280-03353.....	CYRUS L 3.....	28
280-03303.....	ASTRO 90.....	19	280-03360.....	DARA 25.....	27
280-03304.....	ASTRO 120.....	19	280-03361.....	DARA 35.....	27
280-03305.....	CAELUM 60.....	20	280-03362.....	DARA 50.....	27
280-03306.....	CAELUM 75.....	20	280-03364.....	FELIS 75.....	24
280-03307.....	CAELUM 90.....	20	280-03365.....	FELIS 95.....	24
280-03308.....	CAELUM 110.....	20	280-03366.....	FINLAY 2.....	25
280-03309.....	CANIS R 75.....	21	280-03367.....	FINLAY 3.....	25
280-03310.....	CANIS R 90.....	21	280-03368.....	FINLAY 3.5.....	25
280-03311.....	CANIS R 105.....	21	280-03369.....	FINLAY 4.....	25
280-03312.....	CANIS R 120.....	21	280-03370.....	FINLAY 5.....	25
280-03313.....	CANIS S 75.....	22	280-03371.....	FINLAY 6.....	25
280-03314.....	CANIS S 90.....	22	280-03372.....	FINLAY 8.....	25
280-03315.....	CANIS S 105.....	22	280-03373.....	HOKU 4.....	35
280-03316.....	CANIS S 120.....	22	280-03374.....	HOKU 5.....	35
280-03317.....	CANIS S2 75.....	23	280-03375.....	HOKU 6.....	35
280-03318.....	CANIS S2 90.....	23	280-03385.....	PAVO.....	45
280-03319.....	CANIS S2 105.....	23	280-03390.....	AQUILA 3.....	62
280-03320.....	CANIS S2 120.....	23	280-03391.....	AQUILA 4.....	62

INDEX SORT BY SKU

280-03392	AQUILA 6.....	62	280-03486	SAMSON 90.....	54
280-03393	AQUILA 8.....	62	280-03487	SCORPIUS 90.....	55
280-03394	ARES 3.....	63	280-03488	SCORPIUS 100.....	55
280-03395	ARES 4.....	63	280-03490	POLLUX.....	47
280-03396	ARES 5.....	63	280-03491	PYXIS.....	48
280-03397	ARES 6.....	63	280-03492	RASALAS.....	49
280-03398	ARES 8.....	63	280-03493	RASTABAN.....	50
280-03400	SIRIUS 200.....	58	280-03494	REGULUS.....	51
280-03401	SIRIUS 250.....	58	280-03495	RIGEL.....	52
280-03402	SIRIUS 300.....	58	280-03496	SABIK.....	53
280-03403	SOLARIS 56.....	56	280-03498	ALZIR A.....	10
280-03404	SOLARIS 65.....	56	280-03499	ALZIR R.....	11
280-03405	SOLARIS 75.....	56	280-03500	ALZIR S.....	12
280-03406	SAL 60.....	57	280-03501	ALZIR RD.....	13
280-03407	SAL 80.....	57	280-03502	ALZIR SD.....	14
280-03408	SAL 90.....	57	280-03600	ASTREA S.....	64
280-03456	IZAR 250.....	38	280-03601	ASTREA R.....	64
280-03457	IZAR 300.....	38	280-03603	ATRIA.....	65
280-03458	IZAR 350.....	38	280-03613	CARINA 118.....	66
280-03459	IZAR 450.....	38	280-03614	CARINA 218.....	66
280-03460	IZAR 600.....	38	280-03615	CARINA 136.....	66
280-03461	LEO 200.....	40	280-03616	CARINA 236.....	66
280-03462	LEO 250.....	40	280-03617	CARINA 158.....	66
280-03463	LEO 300.....	40	280-03618	CARINA 258.....	66
280-03464	LYNX 450.....	41	280-03620	MIRAM 118.....	81
280-03465	LYNX 600.....	41	280-03621	MIRAM 218.....	81
280-03466	LYNX 900.....	41	280-03622	MIRAM 136.....	81
280-03467	LYNX 1000.....	41	280-03623	MIRAM 236.....	81
280-03468	NAMID 300.....	39	280-03624	MIRAM 158.....	81
280-03469	NAMID 350.....	39	280-03625	MIRAM 258.....	81
280-03470	NAMID 450.....	39	280-03626	NAJIMA 118.....	82
280-03471	NAMID 600.....	39	280-03627	NAJIMA 218.....	82
280-03472	NASHI 120.....	42	280-03628	NAJIMA 136.....	82
280-03473	NASHI 200.....	42	280-03629	NAJIMA 236.....	82
280-03474	NASHI 300.....	42	280-03630	NAJIMA 158.....	82
280-03475	NAVI 120.....	43	280-03631	NAJIMA 258.....	82
280-03476	NAVI 200.....	43	280-03632	NASHIA 60.....	83
280-03477	NAVI 300.....	43	280-03633	NASHIA 120.....	83
280-03480	PHOENIX 300.....	46	280-03634	NASHIA 150.....	83
280-03481	PHOENIX 350.....	46	280-03635	CELESTE 60.....	85
280-03482	PHOENIX 450.....	46	280-03636	CELESTE 120.....	85
280-03483	PHOENIX 600.....	46	280-03637	DANICA 60.....	84
280-03485	SAMSON 70.....	54	280-03638	DANICA 120.....	84

INDEX SORT BY SKU

280-03639.....	DANICA 150.....	84	280-03718.....	BELLATRIX 365 A.....	88
280-03642.....	ELECTRA 118.....	67	280-03719.....	BELLATRIX 365 B.....	88
280-03643.....	ELECTRA 218.....	67	280-03720.....	CALYTRIX 285.....	89
280-03644.....	ELECTRA 136.....	67	280-03721.....	CALYTRIX 320.....	89
280-03645.....	ELECTRA 236.....	67	280-03722.....	CALYTRIX 380.....	89
280-03646.....	ELECTRA 158.....	67	280-03732.....	AZHA.....	90
280-03647.....	ELECTRA 258.....	67	280-03733.....	VEGA S.....	91
280-03650.....	NOVA 01.....	74	280-03734.....	VEGA L.....	91
280-03651.....	NOVA 02.....	74	280-03735.....	VESPER HS.....	92
280-03652.....	NOVA R.....	74	280-03736.....	VESPER HL.....	92
280-03653.....	PHOEBE 250.....	75	280-03737.....	VESPER VS.....	92
280-03654.....	PHOEBE 350.....	75	280-03738.....	VESPER VL.....	92
280-03655.....	PHOEBE 450.....	75	280-03739.....	VESPER V1.....	92
280-03656.....	REALTA 350.....	76	280-03740.....	STELLAN V1.....	93
280-03657.....	REALTA 430.....	76	280-03741.....	STELLAN V2.....	93
280-03660.....	DELPHINUS SQ1.....	77	280-03742.....	SEREN V1.....	94
280-03661.....	DELPHINUS SQ2.....	77	280-03743.....	SEREN V2.....	94
280-03662.....	DELPHINUS RC.....	77	280-03764.....	ROXY S.....	95
280-03664.....	HINATA.....	72	280-03765.....	ROXY D.....	95
280-03666.....	HASHI.....	73	280-03766.....	ARAWAN W.....	97
280-03680.....	ESTELLA 3.....	68	280-03767.....	REALTIN.....	98
280-03681.....	ESTELLA 4.....	68	280-03808.....	ZENITH 1.....	125
280-03682.....	ESTELLA 6.....	68	280-03809.....	ZENITH 1S.....	125
280-03683.....	ESTELLA 8.....	68	280-03810.....	ZENITH 2.....	125
280-03684.....	ETOILE.....	69	280-03811.....	ZENITH 2S.....	125
280-03685.....	HELENE C.....	70	280-03812.....	YANG 1.....	126
280-03686.....	HESPER C.....	71	280-03813.....	YANG 2.....	126
280-03696.....	MAIA A.....	78	280-03814.....	HYDRUS R.....	128
280-03697.....	MAIA B.....	78	280-03815.....	HYDRUS O.....	128
280-03698.....	MAIA C.....	78	280-03816.....	TARAK.....	86
280-03699.....	MEISSA A.....	79	280-03817.....	NYOTA S.....	127
280-03700.....	MEISSA B.....	79	280-03818.....	NYOTA SS.....	127
280-03701.....	MEISSA C.....	79	280-03819.....	NYOTA L.....	127
280-03702.....	LYRA A.....	80	280-03820.....	NYOTA LS.....	127
280-03703.....	LYRA B.....	80	280-03821.....	SIDRA A.....	119
280-03710.....	AURIGA 220.....	87	280-03822.....	SIDRA B.....	119
280-03711.....	AURIGA 265.....	87	280-03823.....	SUNAN A.....	120
280-03712.....	AURIGA 330.....	87	280-03824.....	SUNAN B.....	120
280-03713.....	AURIGA 390.....	87	280-03825.....	SHAULA A.....	121
280-03714.....	BELLATRIX 280 A.....	88	280-03826.....	SHAULA B.....	121
280-03715.....	BELLATRIX 280 B.....	88	280-03827.....	GUNAY S.....	99
280-03716.....	BELLATRIX 320 A.....	88	280-03828.....	GUNAY L.....	99
280-03717.....	BELLATRIX 320 B.....	88	280-03829.....	ASTROPHEL.....	103

INDEX SORT BY SKU

280-03830.....MEHR L.....100	280-03927.....DRACO B.....131
280-03831.....MEHR H.....100	280-03928.....PEGASUS A.....132
280-03832.....HESPEROS.....105	280-03929.....PEGASUS B.....133
280-03833.....UMBRIEL W.....101	280-03931.....CORVUS F.....144
280-03834.....UMBRIEL S.....101	280-03932.....CASSIOPEIA F1.....134
280-03835.....ALSEPHINA A.....104	280-03933.....CASSIOPEIA F2.....134
280-03836.....ALSEPHINA AS.....104	280-03934.....HEAVEN A F1.....135
280-03837.....LINTANG AS.....114	280-03935.....HEAVEN A F2.....135
280-03838.....LINTANG BS.....115	280-03936.....HEAVEN A F3.....135
280-03839.....LINTANG AD.....114	280-03937.....HEAVEN B F1.....136
280-03840.....LINTANG BD.....115	280-03938.....HEAVEN B F2.....136
280-03841.....HELENE WS.....116	280-03939.....HEAVEN B F3.....136
280-03842.....HELENE WD.....116	280-03940.....SVETLANA B.....140
280-03843.....HESPER WS.....117	280-03941.....TALITHA G.....141
280-03844.....HESPER WD.....117	280-03942.....ALCOR G.....143
280-03847.....CASSIOPEIA W.....111	280-03943.....BUNDA G1.....142
280-03848.....ROXANNE W.....106	280-03944.....BUNDA G2.....142
280-03849.....HEAVEN W.....107	280-03948.....CHASON 1.....139
280-03850.....SVETLANA W.....112	280-03949.....CHASON 2.....139
280-03851.....TALITHA W.....118	280-03950.....CHASON 3.....139
280-03852.....VELA R.....108	280-03951.....DIADEM 1.....137
280-03853.....VELA S.....108	280-03952.....DIADEM 2.....137
280-03854.....ROXY W.....96	280-03953.....DIADEM 3.....137
280-03855.....TARABAI S.....113	280-03954.....FULU L.....138
280-03856.....TARABAI SS.....113	280-03955.....FULU H.....138
280-03857.....TARABAI D.....113	280-03956.....NAOS S A.....145
280-03858.....TARABAI DS.....113	280-03957.....NAOS S B.....145
280-03859.....TARABAI TS.....113	280-03958.....NAOS S C.....145
280-03860.....YVAINE W.....102	280-03959.....NAOS R A.....146
280-03861.....YVAINE W-SL.....102	280-03960.....NAOS R B.....146
280-03862.....ZANIAH W-SL.....109	280-03961.....NAOS R C.....146
280-03863.....ZVEZDA W.....110	280-03962.....PETRA A.....148
280-03870.....ANDROMEDA A.....122	280-03963.....PETRA B.....148
280-03871.....ANDROMEDA B.....122	280-03964.....SKAT.....149
280-03872.....ANDROMEDA C.....122	280-03965.....CORVUS PT.....151
280-03873.....ANDROMEDA D.....122	280-03966.....SVETLANA PD.....150
280-03874.....SERPENS A.....123	280-03967.....URUK A.....147
280-03875.....SERPENS B.....123	280-03968.....URUK B.....147
280-03876.....SERPENS C.....123	280-03969.....URUK C.....147
280-03877.....SERPENS D.....123	280-03970.....URUK D.....147
280-03905.....ARAWAN F.....129	
280-03906.....ARAWAN FS.....129	
280-03926.....DRACO A.....130	

FOR YOUR NOTES

Dotted lines for writing notes.

FOR YOUR NOTES



TEKLED UK LTD.

Unit 21, Beeston Business Park, Technology Drive,
NG9 1LA, Beeston, Nottingham-England, U.K.

CONSENSUS CONSULTANCY LTD.

Unit 17, Apollo Court, Vulcan Valley, Coalville,
LE67 3FD, Leicester-England, U.K.

www.tekled.co.uk